# EIKA

# SYNTHEX

schematic diagrams

#### HOW TO RECALIBRATE ELKA SYNTHEX' OSCILLATORS.

The board you have to look at is no 5840, which is at the bottom of the 4-board-group on the left side.

#### SOUND GENERATOR (OSCILLATOR) CALIBRATION.

The 16 oscillators of Synthex' voices are digital, their tuning is controlled only by number codes that cannot change as time passes by, so the tuning is stable and reliable. Since the voice - oscillators must be frequency-controlled by means of the LFO and the pitch bend, 4 reference frequency generators are used to which the voice-oscillators link; they can be imagined as 4 electronic diapason that can be modulated by the LFO and by the bend. We can refer to these 4 generators as: Gen A, Gen B, Gen C, Gen D.

## In SPLIT and DOUBLE mode the assignation is as follows:

```
Gen A: OSC-1 upper (4 voices)
Gen B: OSC-2 upper (4 voices)
Gen C: OSC-1 lower (4 voices)
Gen D: OSC-2 lower (4 voices)
```

# In NORMAL mode the assignation ia as follows:

# The generators calibration is divided into 4 steps:

step-1: starting settings

step-2: calibration of Gen B: OSC-2 referring to Gen A: OSC-1

step-3: calibration of Gen C: OSC-1L referring to Gen A: OSC-1U

step-4: calibration of Gen D: OSC-2L referring to Gen A: OSC-1U

If for some of these steps you reach the limit of one trimmer, you can solve the problem by using the corresponding Gen A trimmers 1or 2, repeating of the three steps;

if the problem is on T4, T6, T8 then you can use the trimmer T1 which is situated on the board no 5801 which is on the small panel close to the joystick.

The trimmer T1 sets the centering of DETUNE. The trimmer T2 sets the centering of MASTER TUNE. The trimmer T3 sets the end value tune of BEND + The trimmer T5 sets the end value tune of BEND -

#### STEP-1 STARTING SETTINGS

joystick panel:

sliders BEND to osc = 10all the other sliders = 0 upper/lower/both selector = BOTH

panel settings:

DOUBLE = OFF SPLIT = OFF PANEL = ON

TUNING

MASTER TUNE = 0 DETUNE = 0

OSC 2 SYNC = OFF

OSCILLATOR 1

OCTAVE = 4' TRANSPOSE = 0

WAVEFORM = ramp ( sawtooth)

VOLUME = 10

OSCILLATOR 2

OCTAVE = 4TRANSPOSE = 0 WAVEFORM = ramp VOLUME = 10

FILTER

FREQUENCY = 10 ENVELOPE = 0RESONANCE = 0 KEYBOARD = 0Filter Modes = LP

CHORUS

OFF

GLIDE / PORTAMENTO

all OFF

LFO ROUTING all OFF

NOISE GENERATOR

all OFF

### STEP - 2: CALIBRATION OF GEN B: OSC-2 REFERRING TO GEN A: OSC-1

- 1) Enable HOLD
- 2) Press the C4 key ( you could use any other key, but it's necessary that the frequency is high in order to better hear to the beats)
- 3) Bring and hold the joystick to the maximum BEND + value
- 4) Reduce the beats as much as you can by means of trimmer T3
- 5) Bring and hold the joystick to the maximum BEND value
- 6) Reduce the beats as much as possible by means of trimmer T4
- 7) Repeat from instruction 3) to instruction 6) till the beat is the least through all the joystick range
- 8) Disable HOLD

#### STEP - 3: CALIBRATION OF GEN C: OSC-1L REFERRING TO GEN A: OSC-1U


- 1) Set OSC 2 VOLUME = 0
- 2) Enable HOLD
- 3) Enable DOUBLE
- 4) Enable LOWER
- Select PANEL (make sure that HOLD is enabled)
- 6) Press the C4 key
- 7) Bring and hold the joystick to the maximum BEND + value
- 8) Reduce the beats as much as you can by means of trimmer T5
- 9) Bring and hold the joystick to the maximum BEND value
- 10) Reduce the beats as much as possible by means of trimmer T6
- 11) Repeat from instruction 7) to instruction 10) until the beat is the least through all the joystick range


### STEP - 4: CALIBRATION OF GEN D: OSC-2L REFERRING TO GEN A: OSC-1U

#### LOWER is enabled since STEP-2

- 1) Set the OSC-1 VOLUME to 0
- 2) Set the OSC-2 VOLUME to 10
- Bring and hold the joystick to the maximum BEND + value
- 4) Reduce the beats as much as you can by means of trimmer T5
- 5) Bring and hold the joystick to the maximum BEND value
- 6) Reduce the beats as much as possible by means of trimmer T6
- 7) Repeat from instruction 3) to instruction 6) until the beat is the least through all the joystick range


(Now see the BMP file we're enclosing)

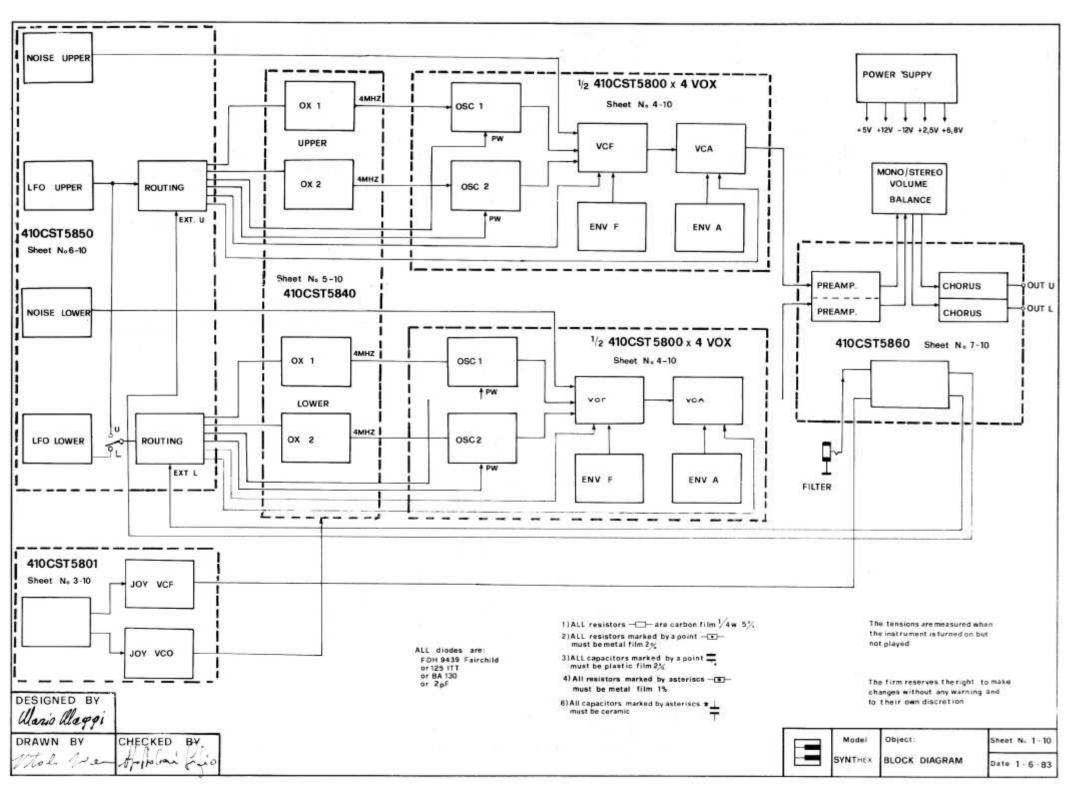


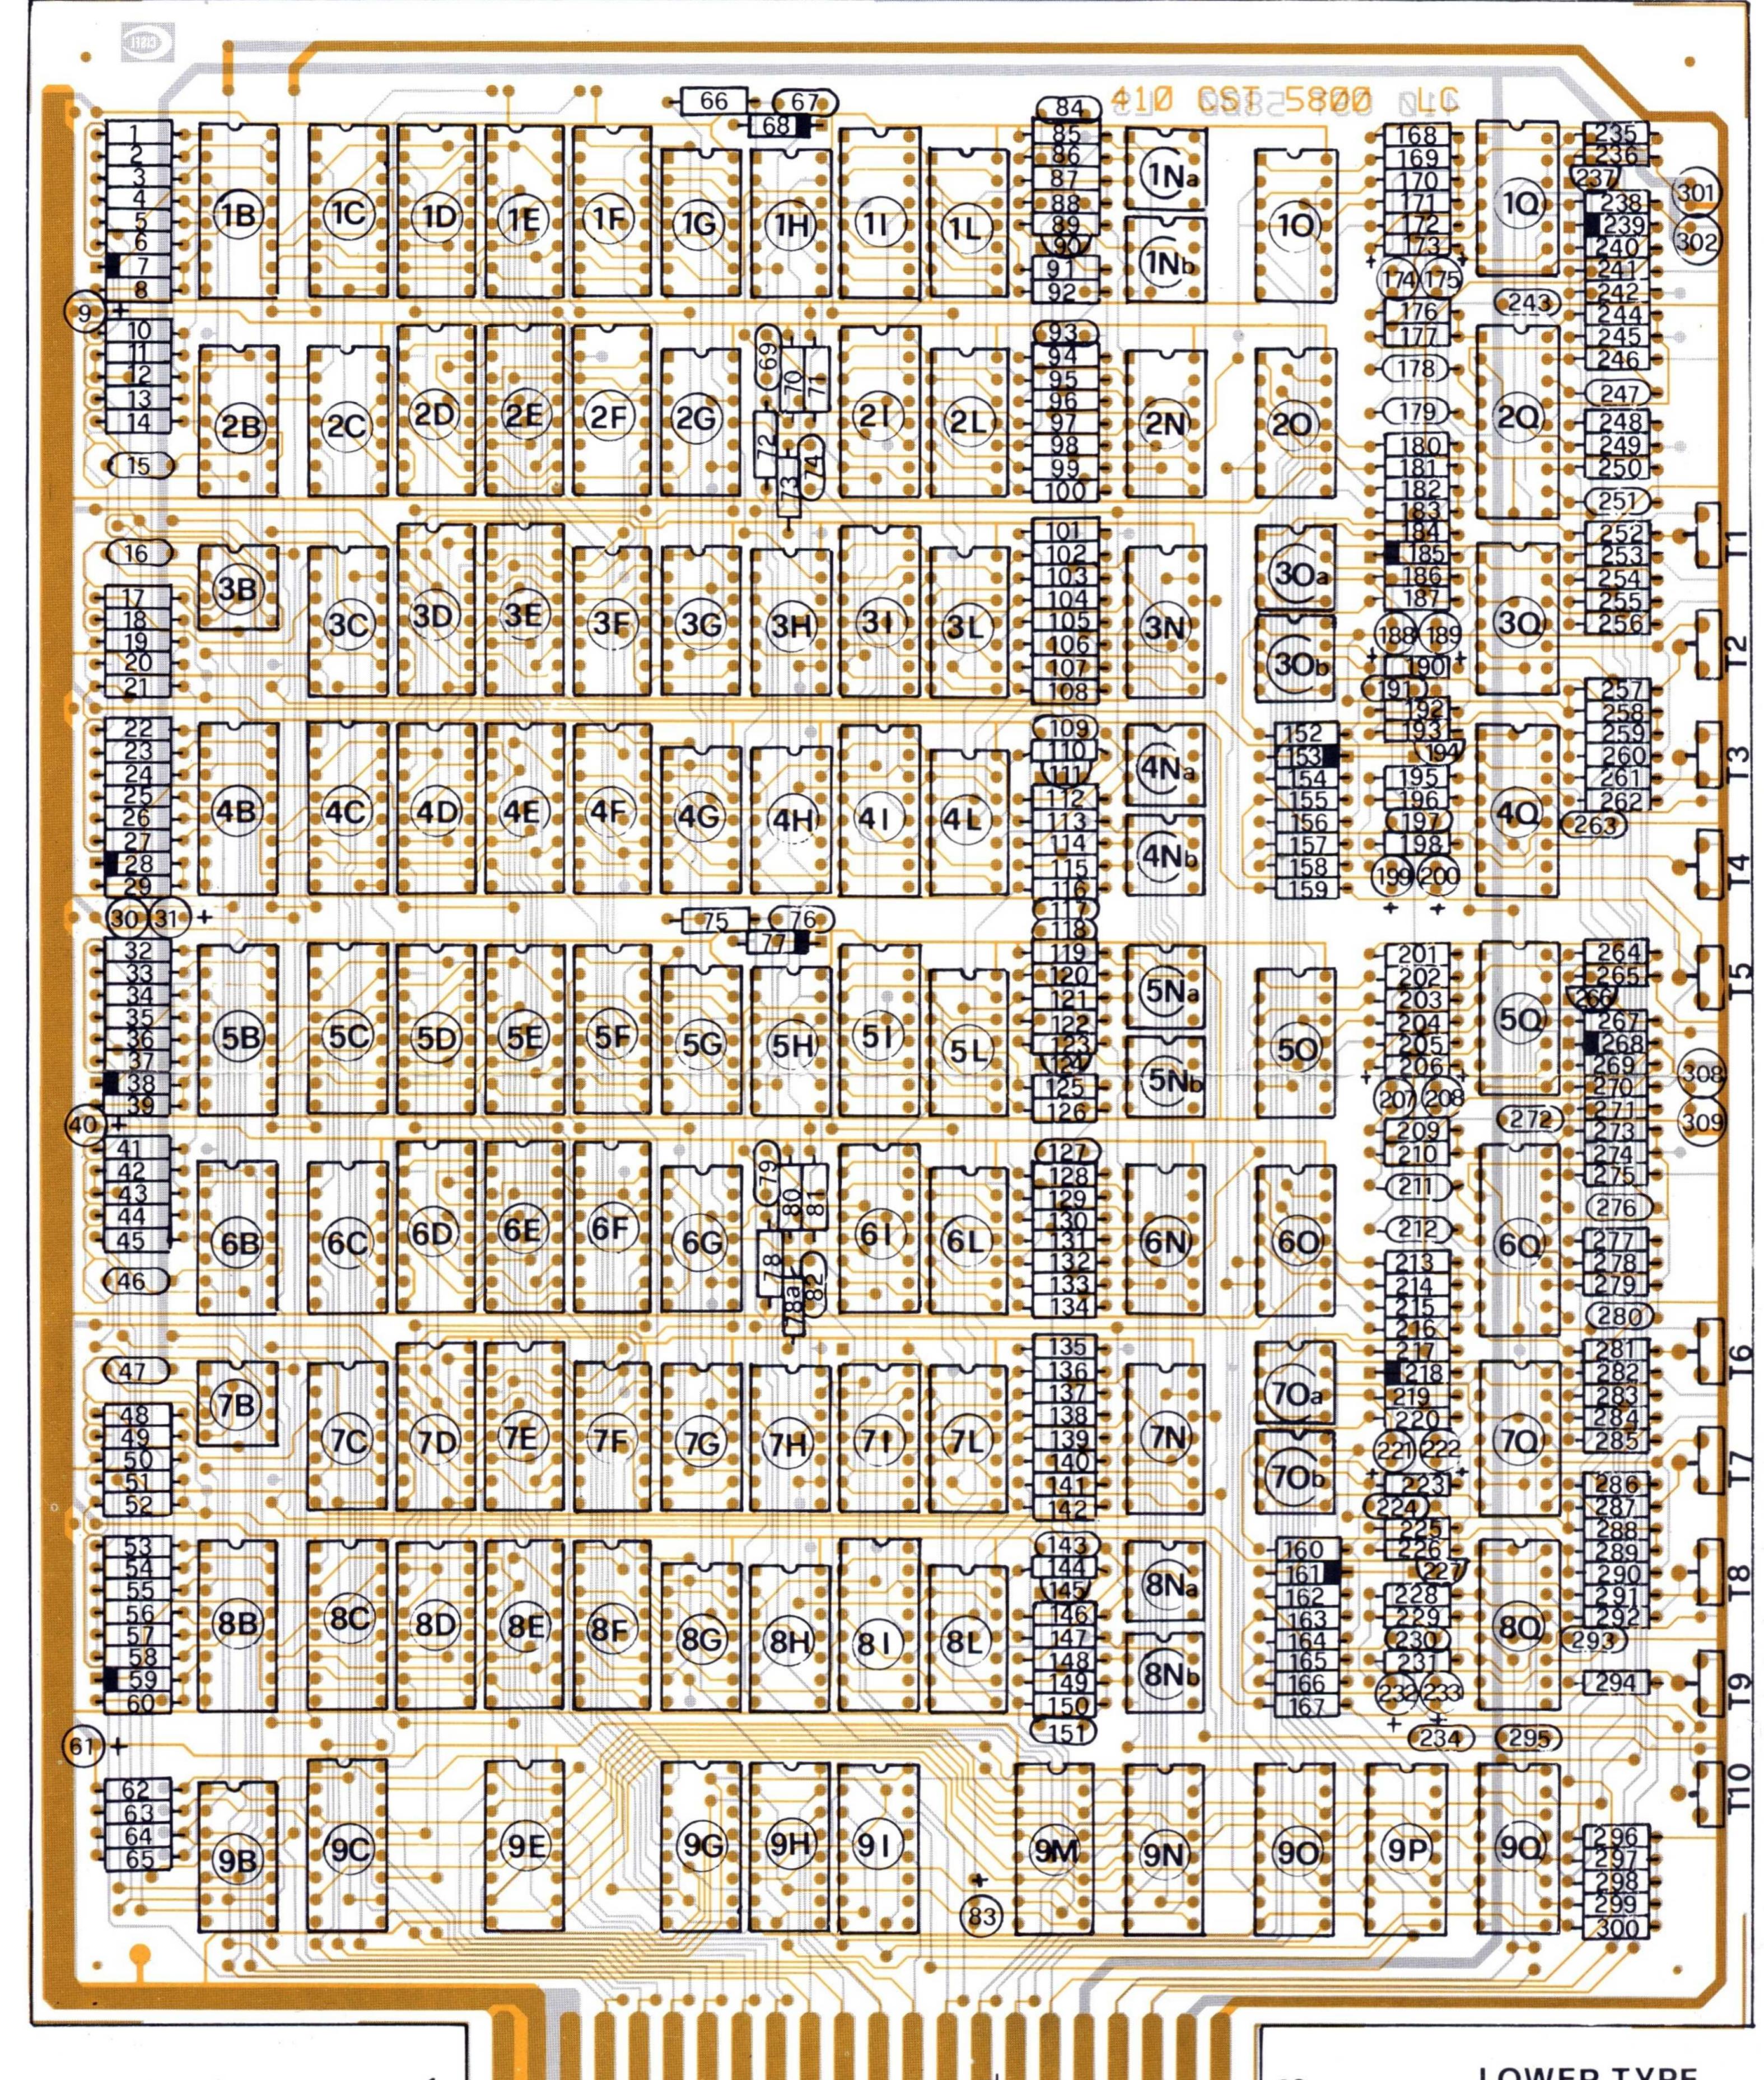


LOWER TYPE


	Model	Sheet No4a - 10
	SYNTHEX	Date 1-6-83

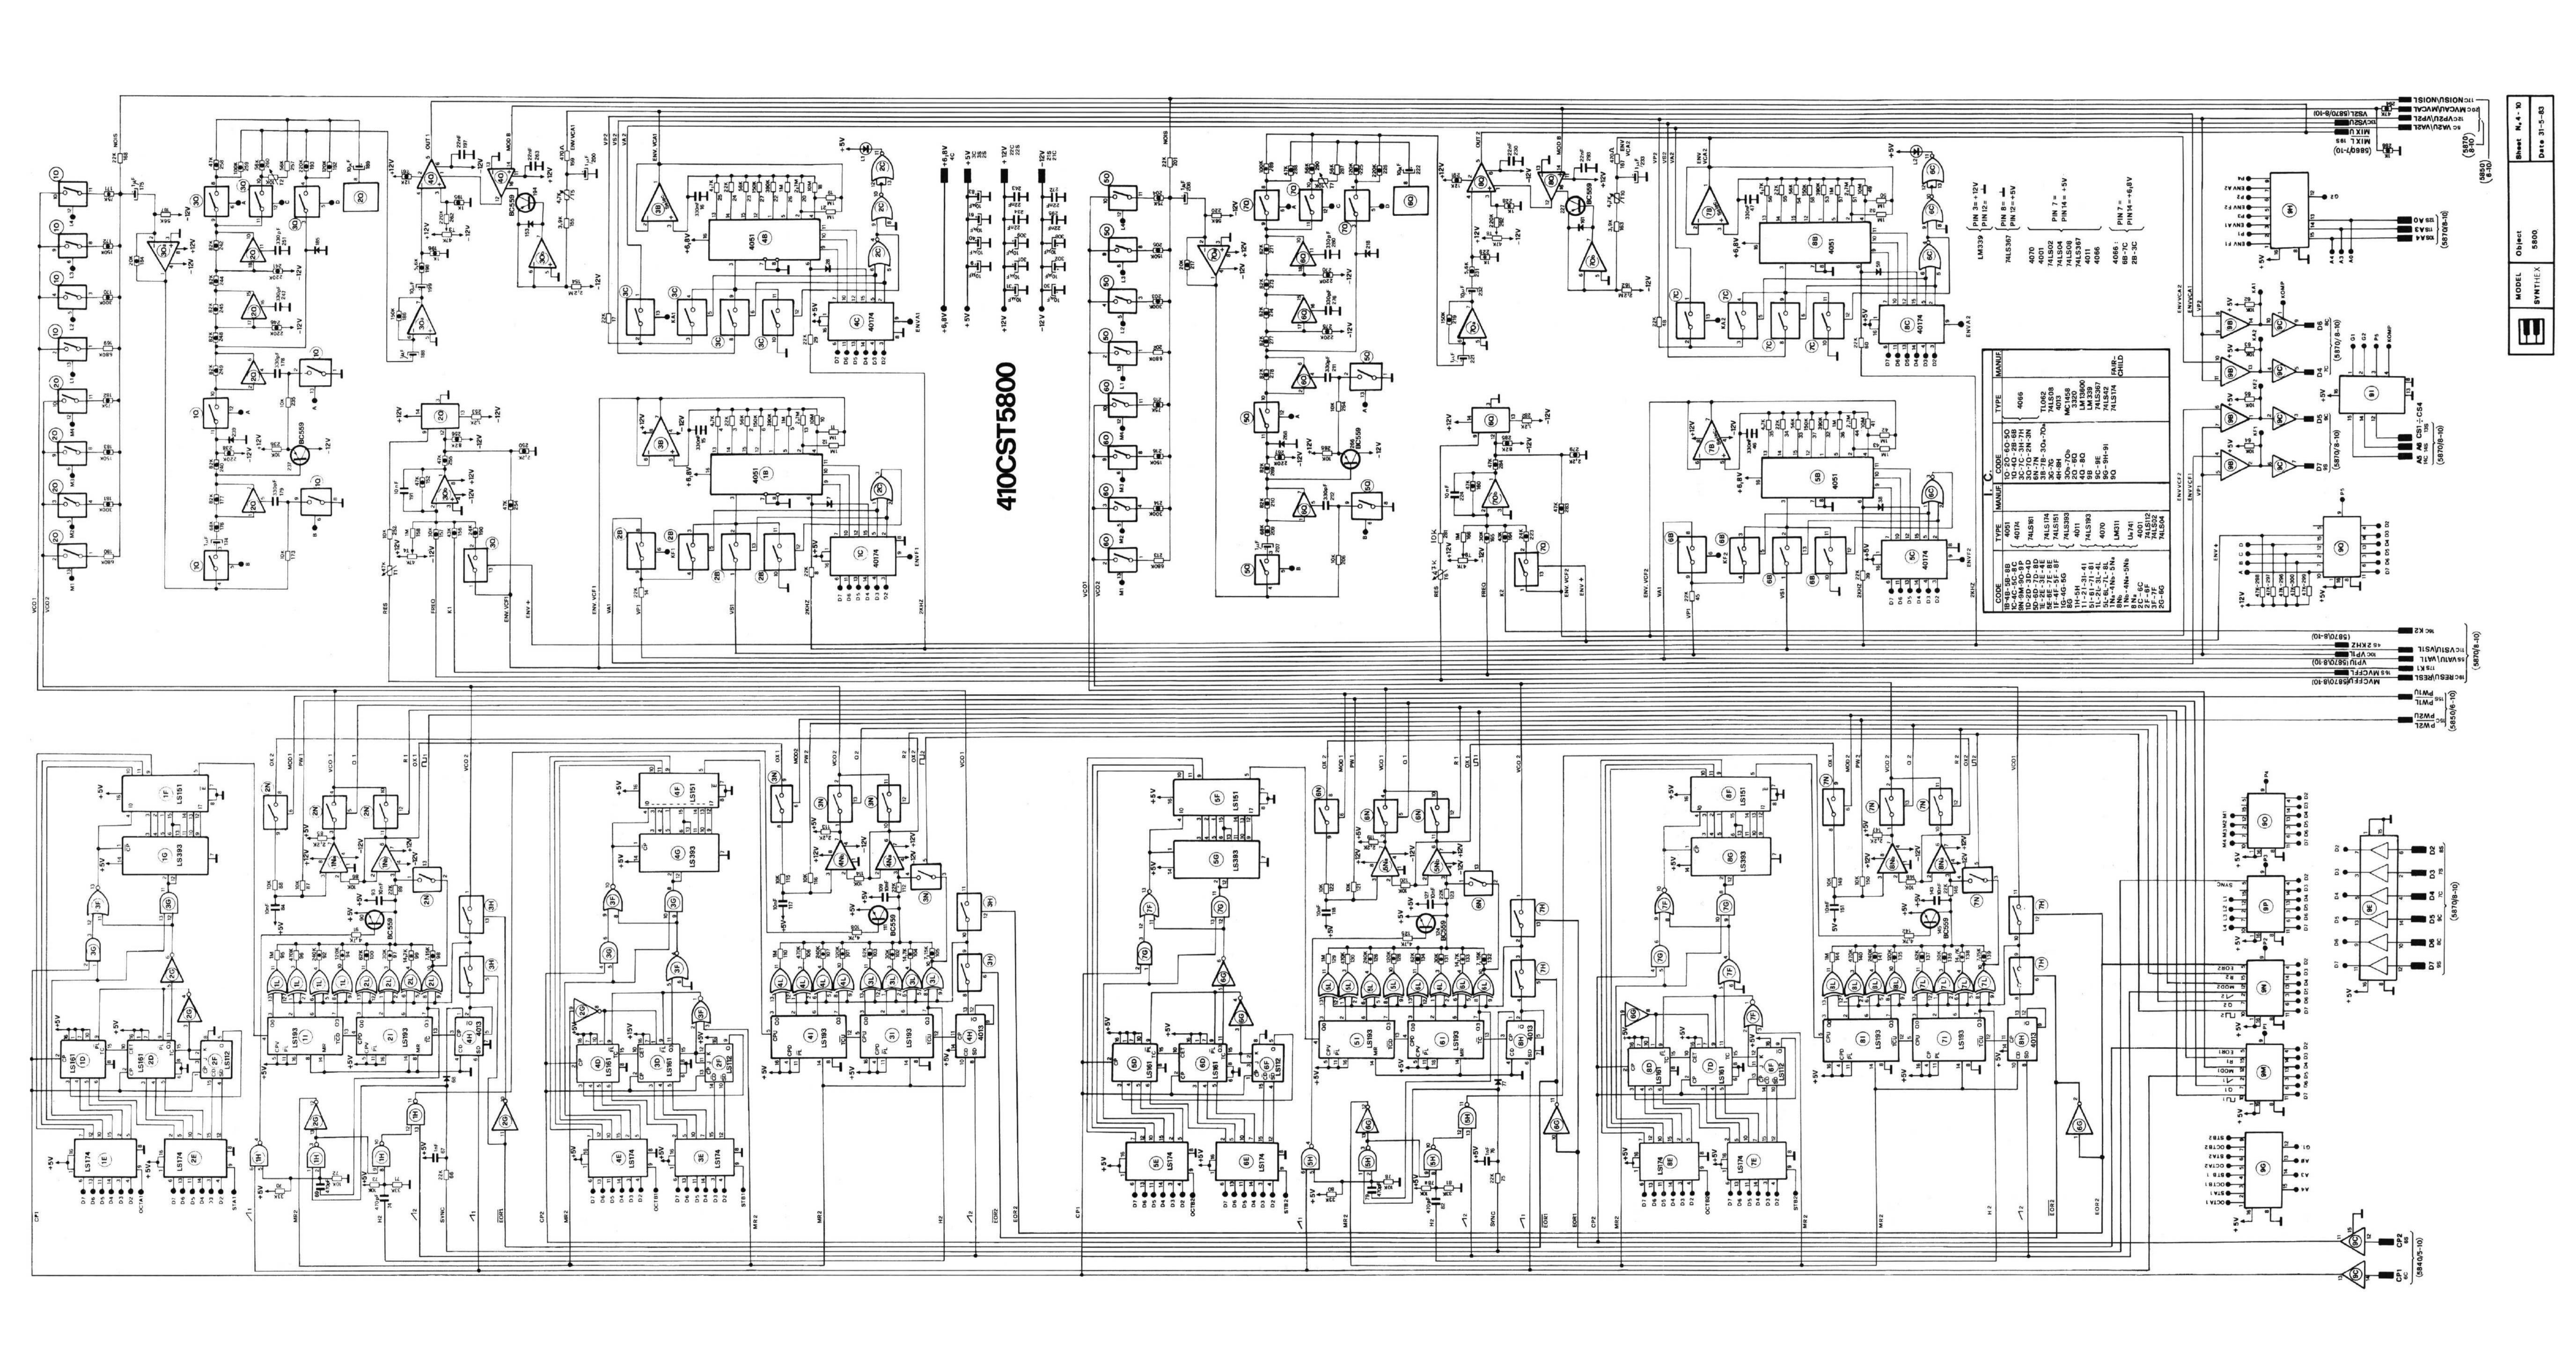

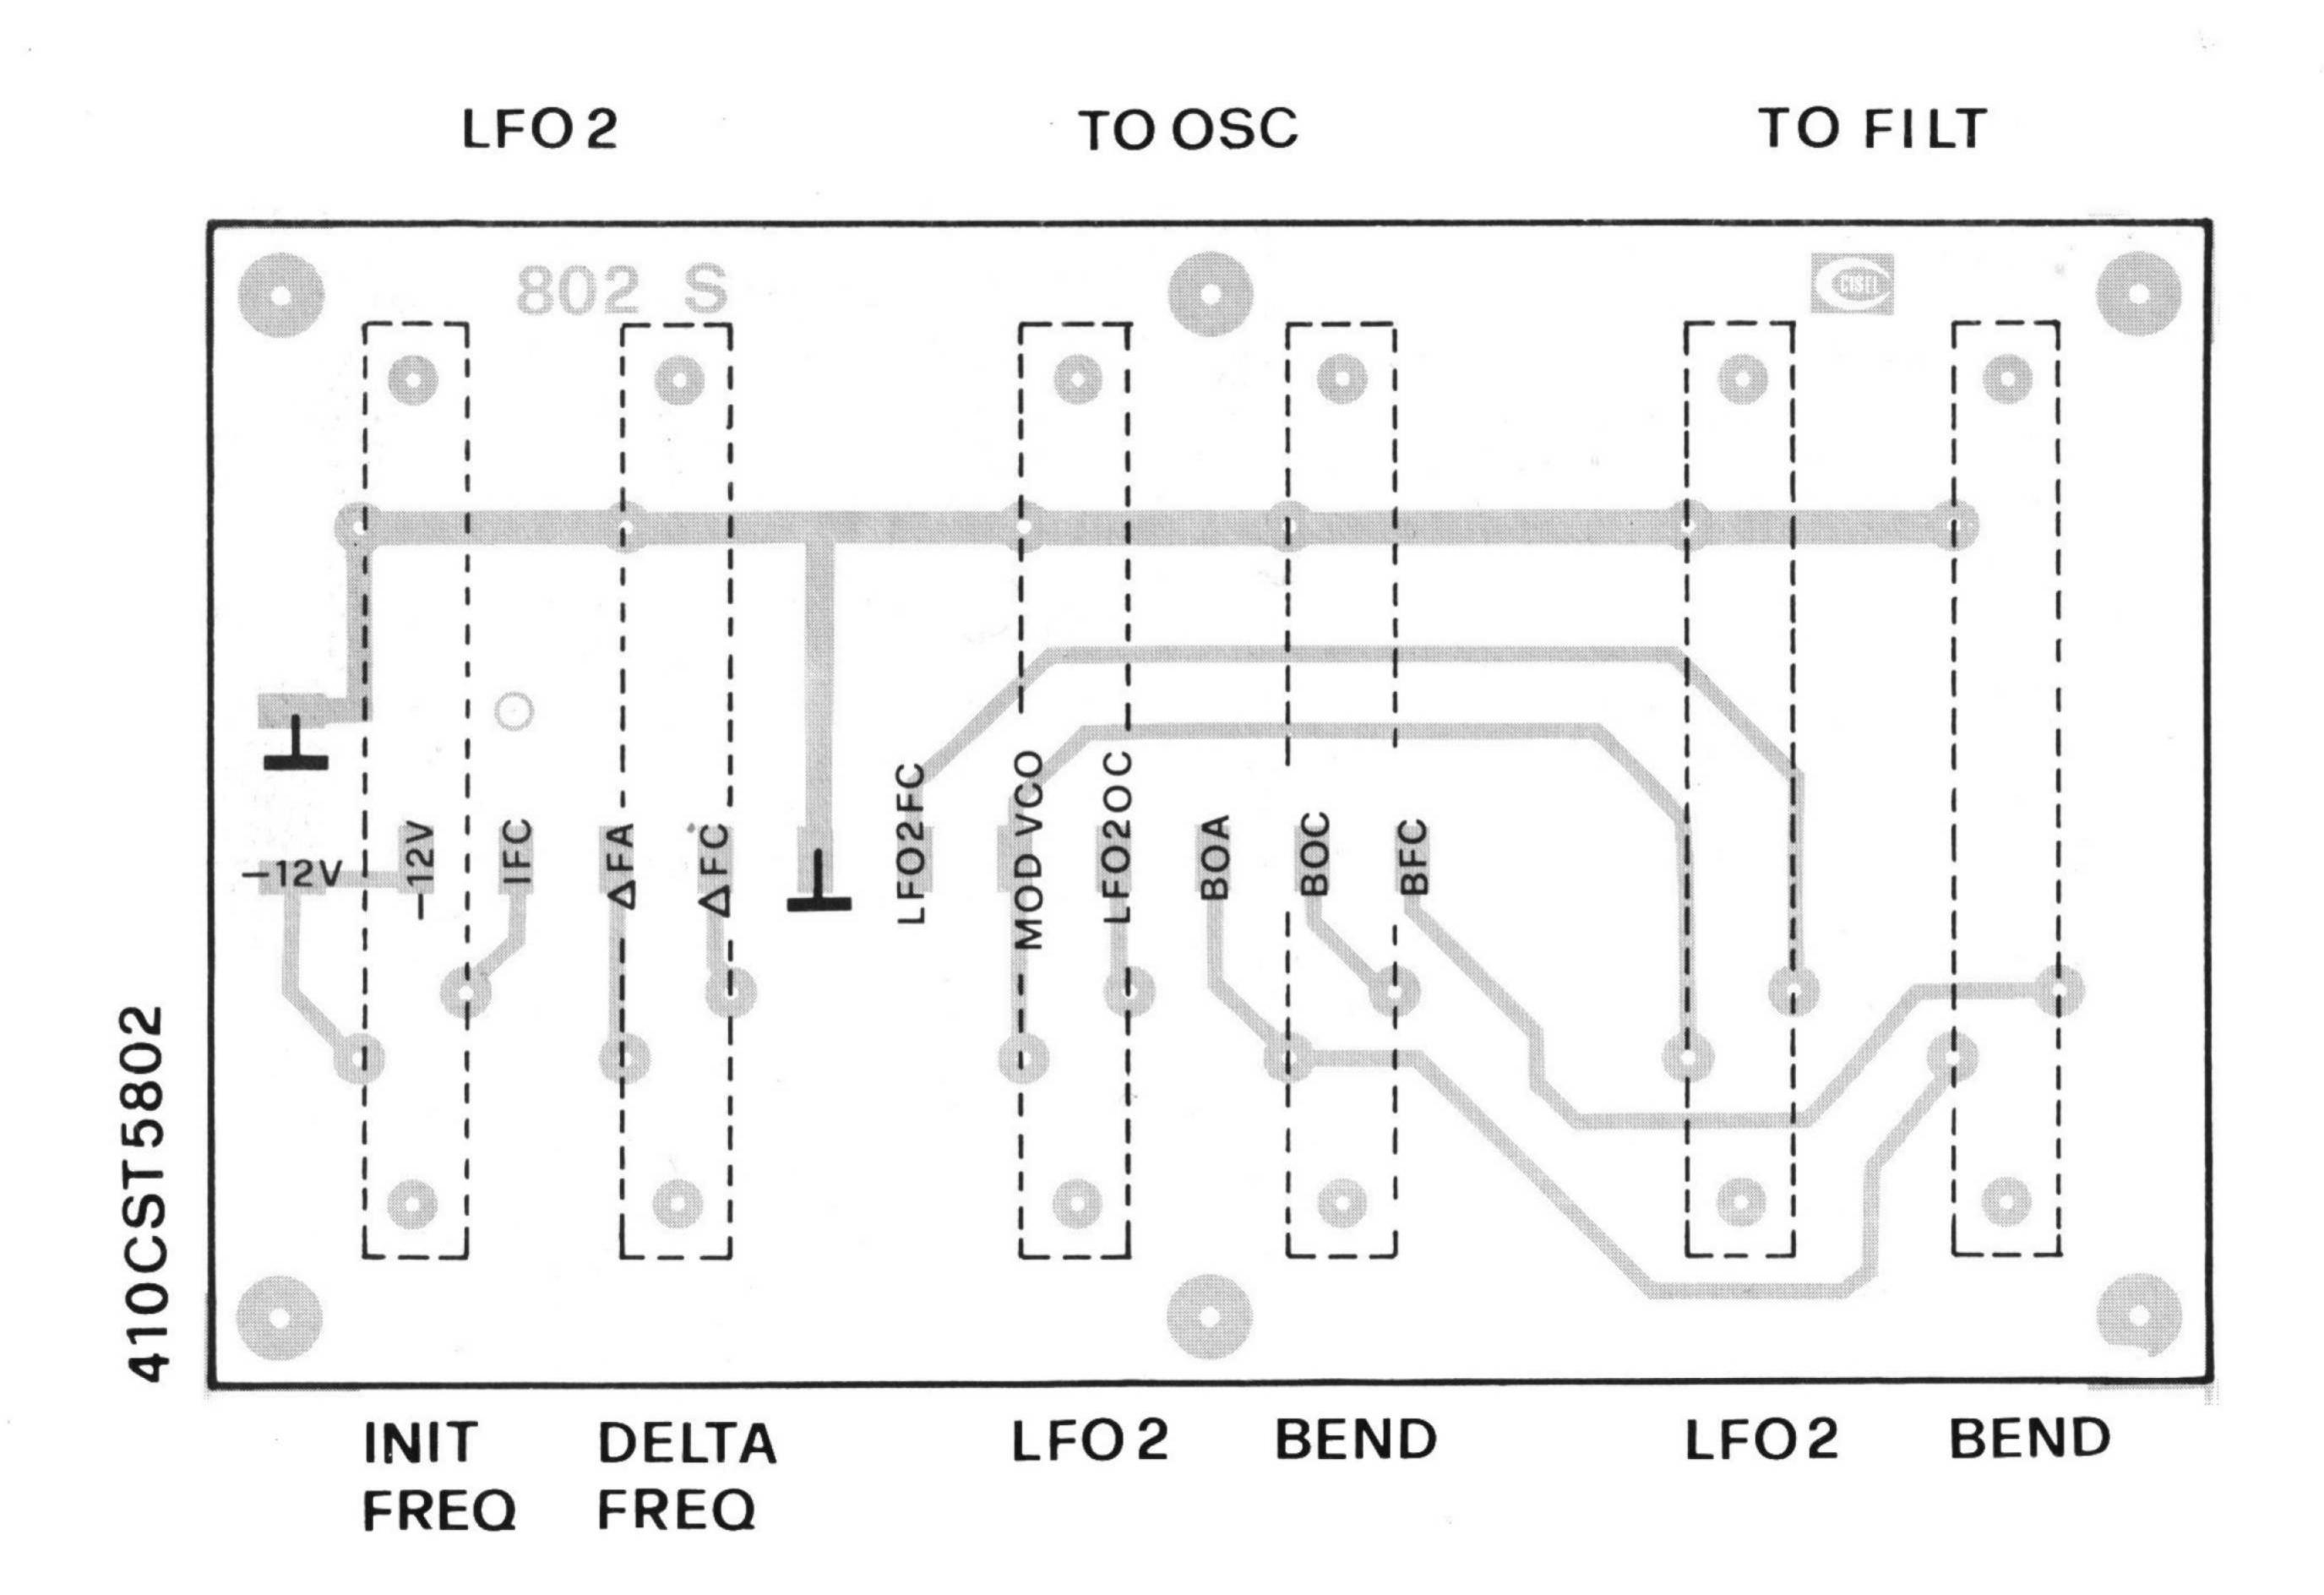



410CST5803

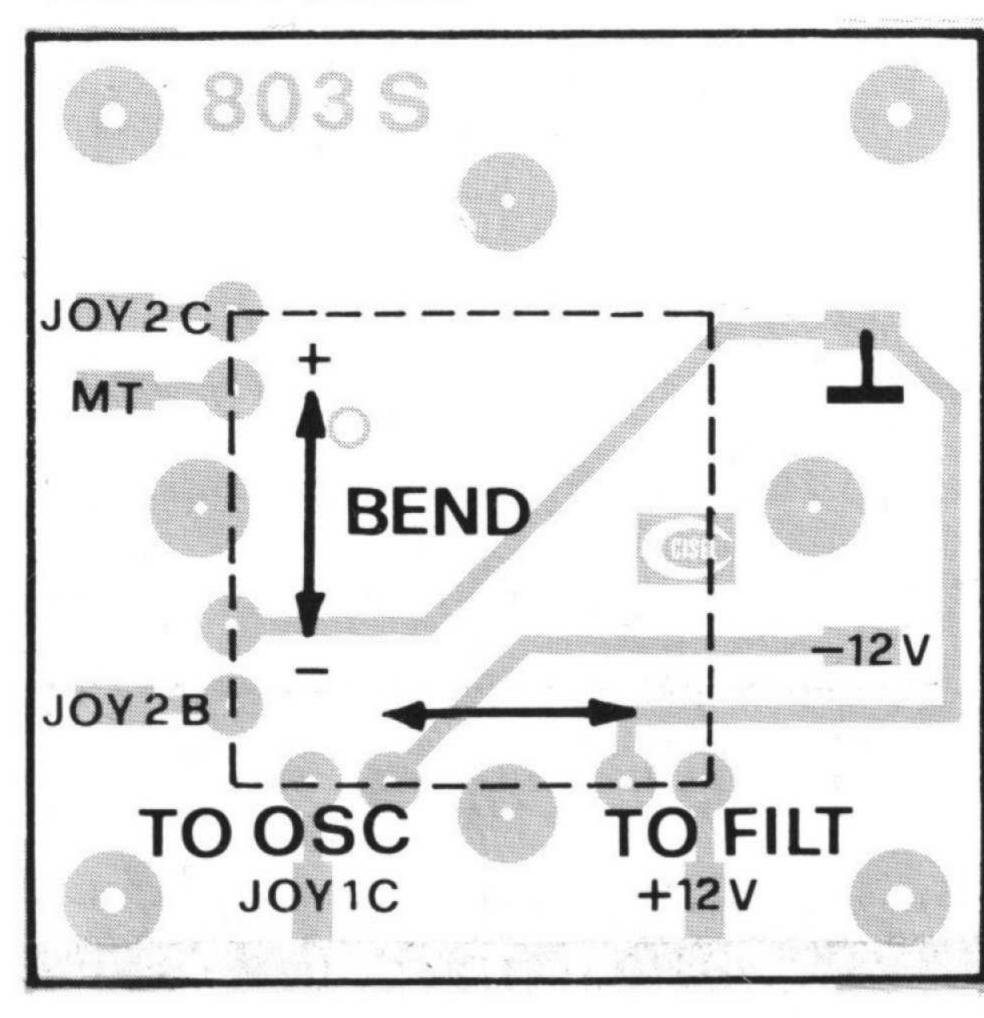


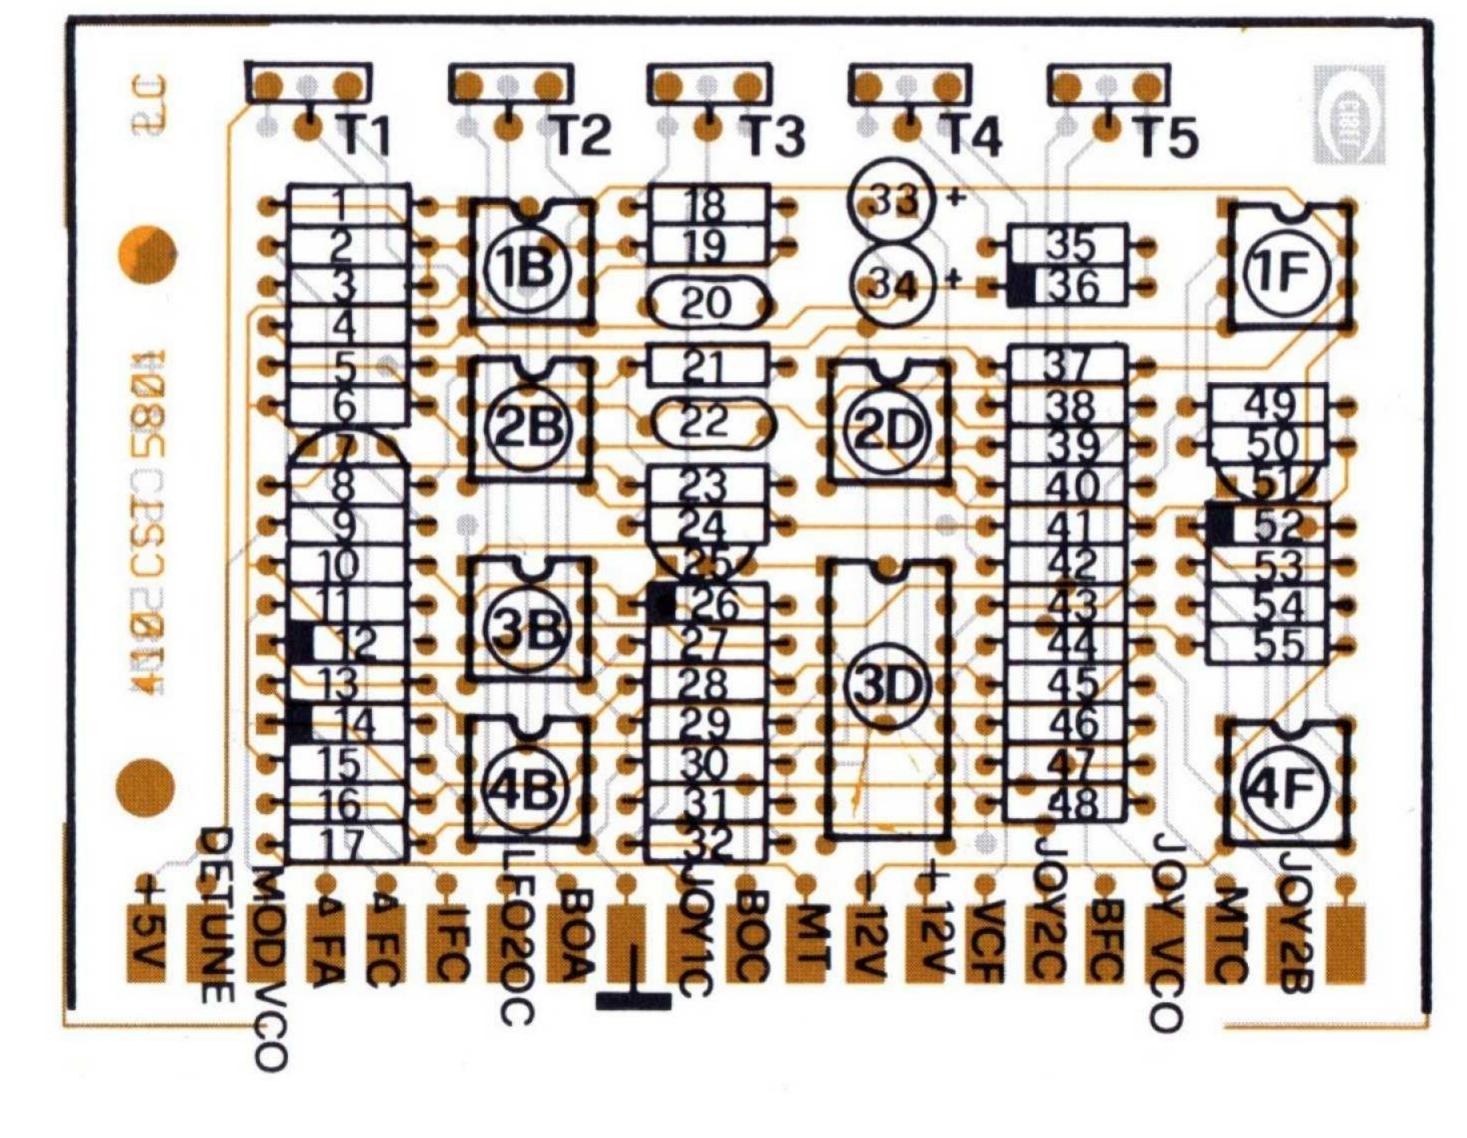


410CST5804

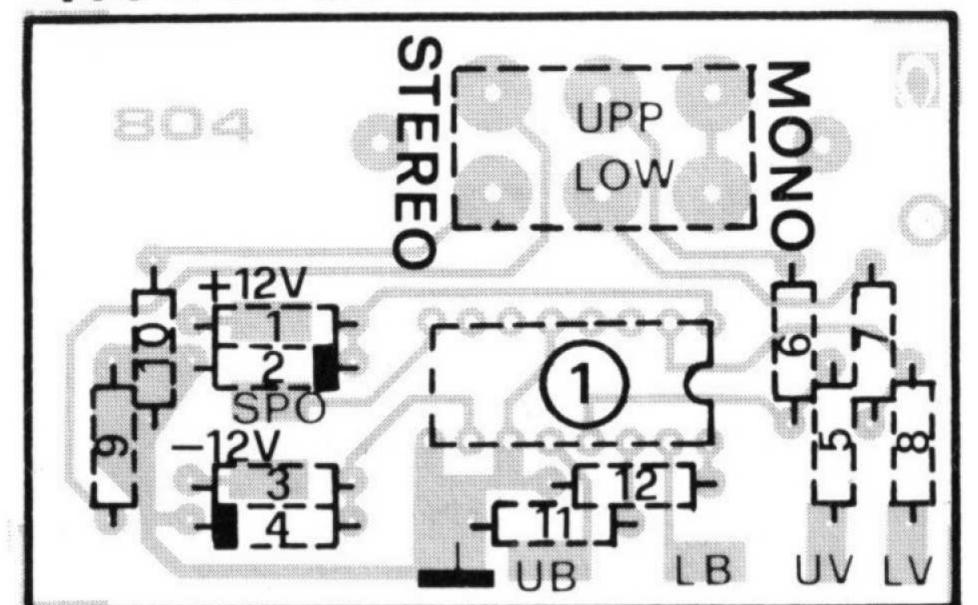

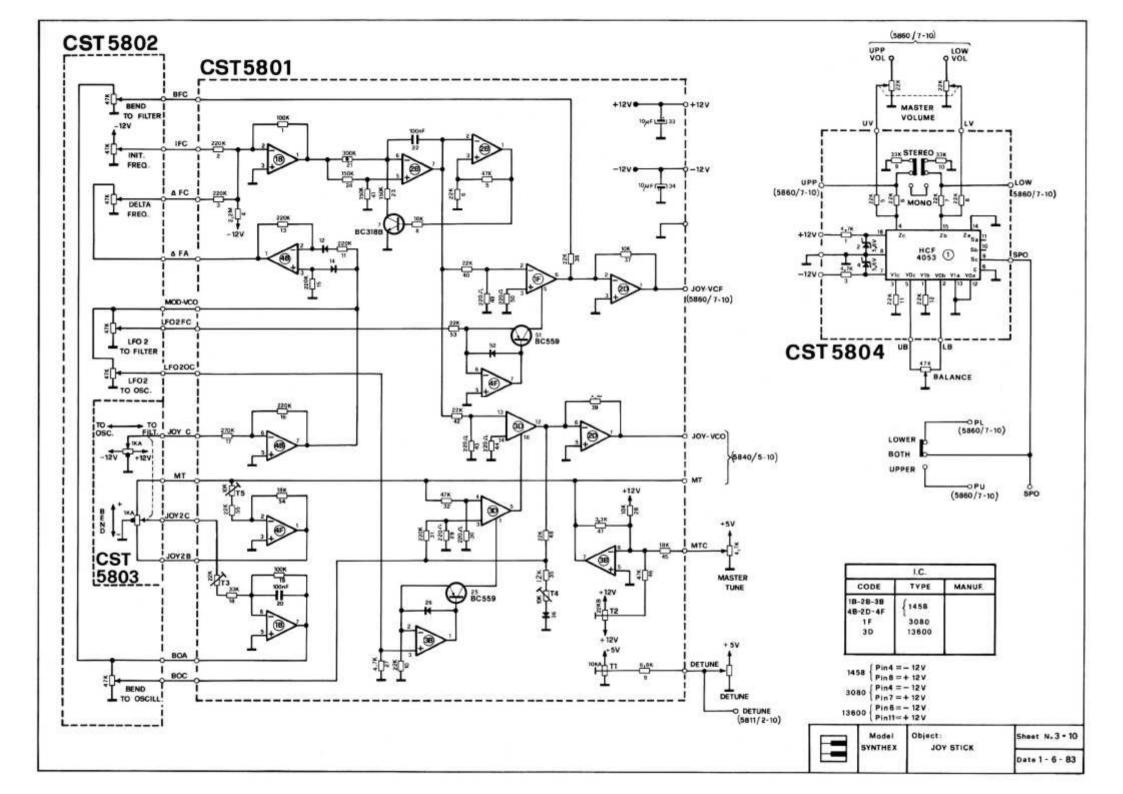

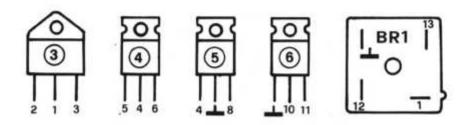

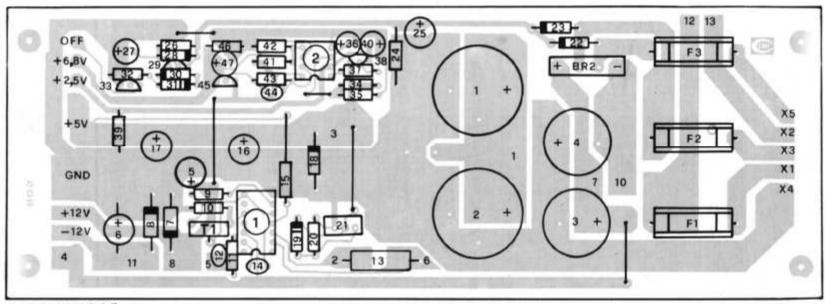


410CST5805


=


Model SYNTHEX Sheet No 10a - 10


Date 1-6-83

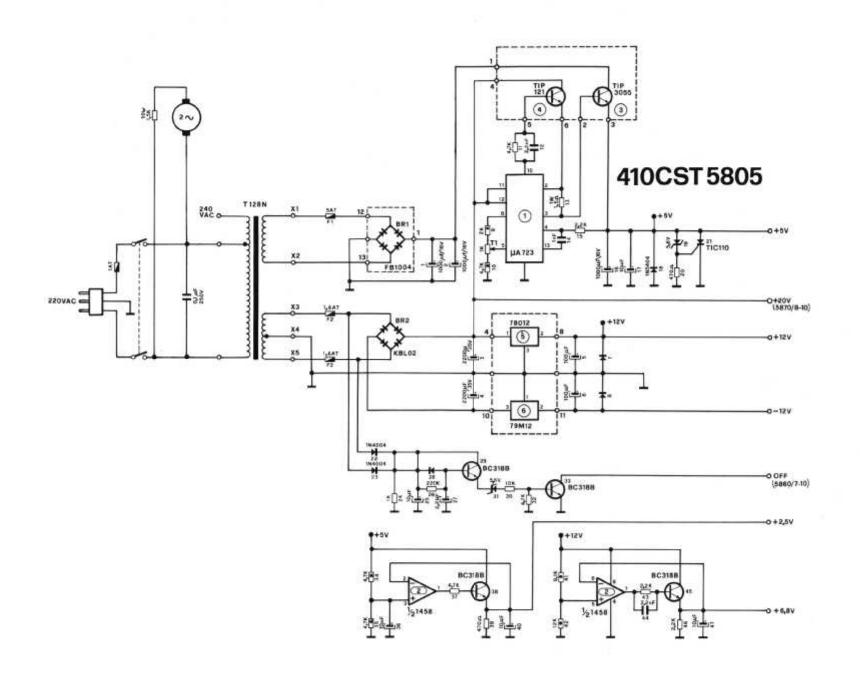

Model

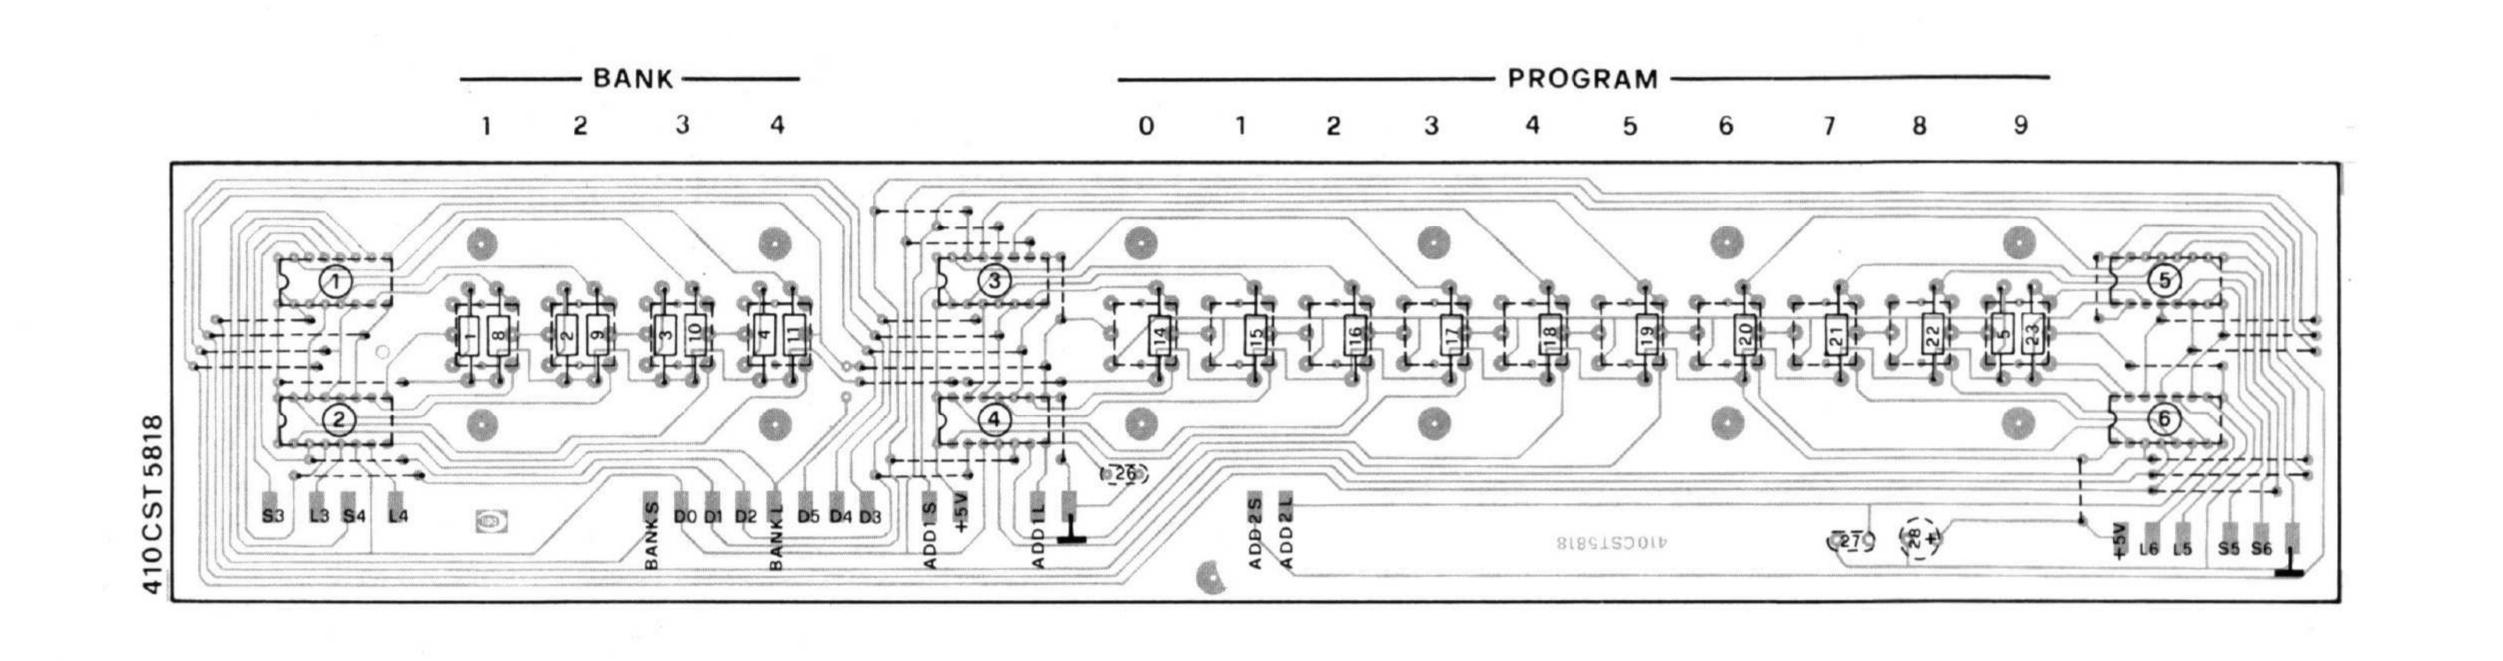

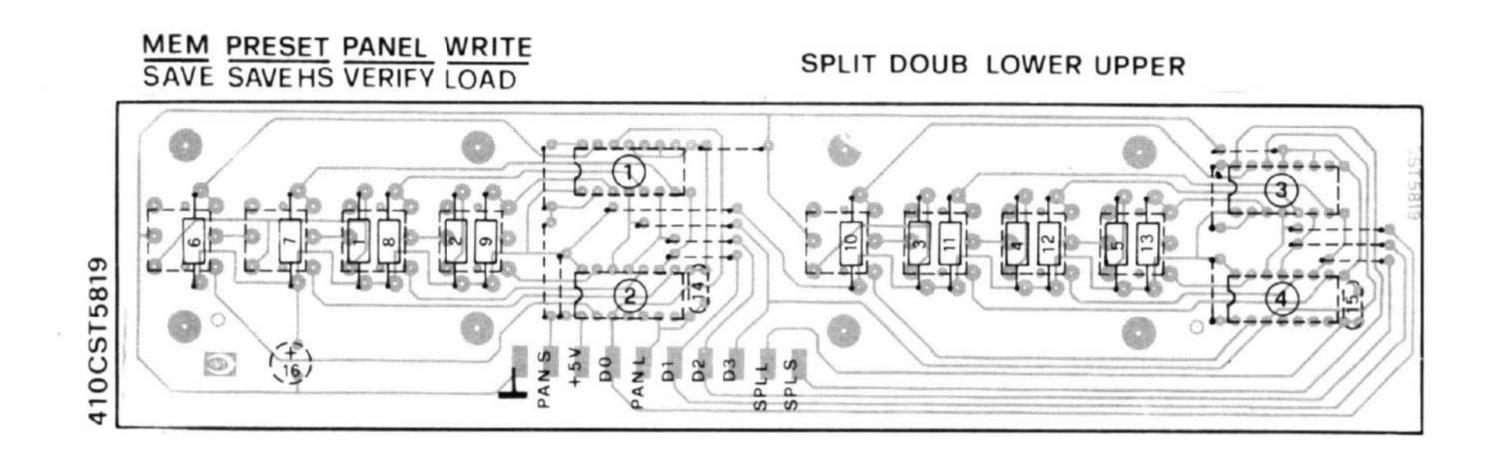

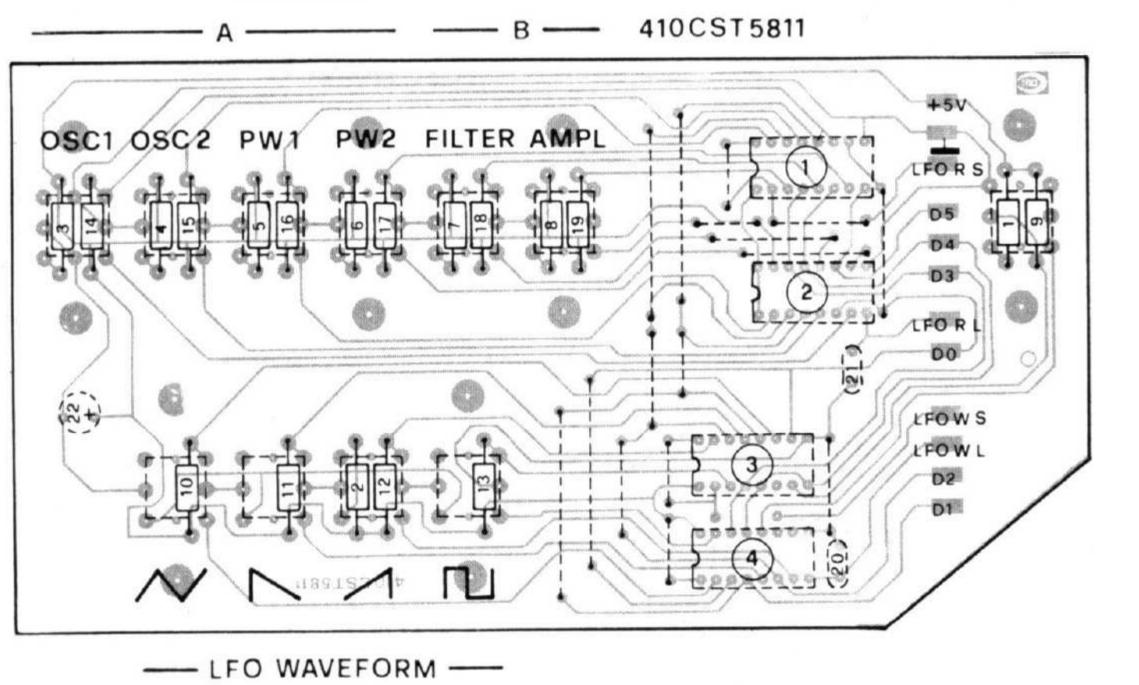



Sheet No 2a - 10


Date 1 - 6 - 83


SYNTHEX


- ROUTING ----

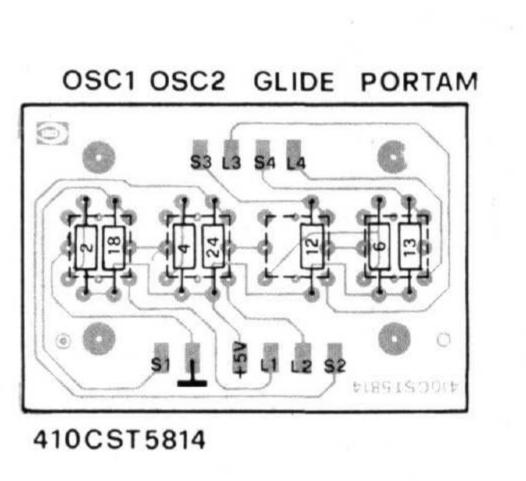


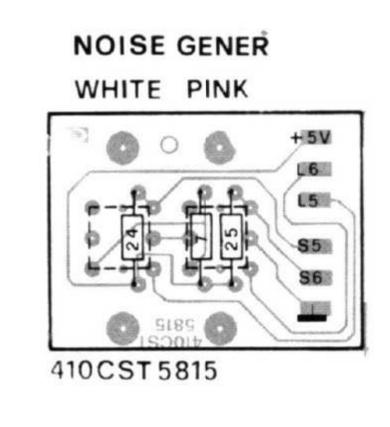


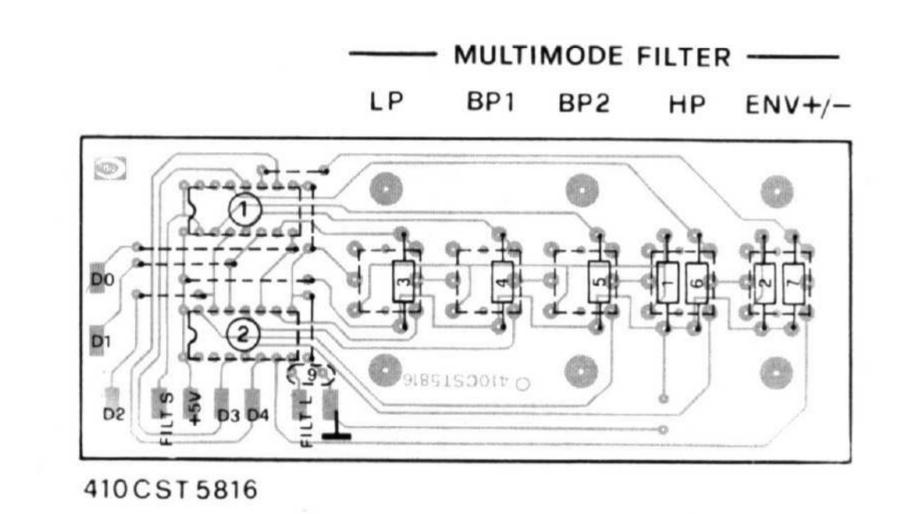


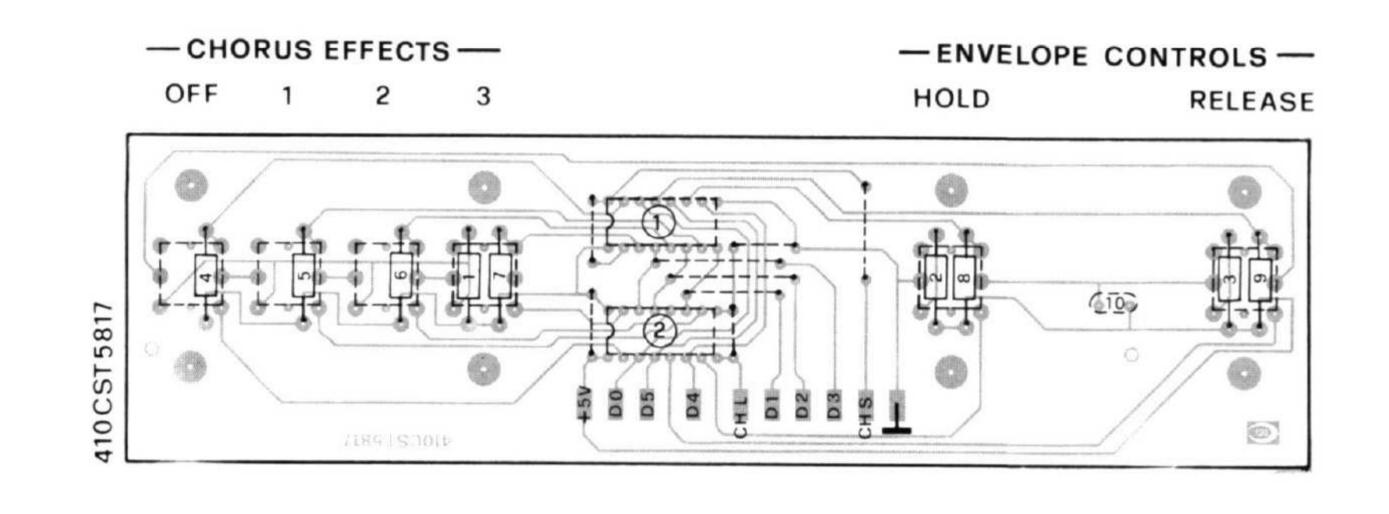


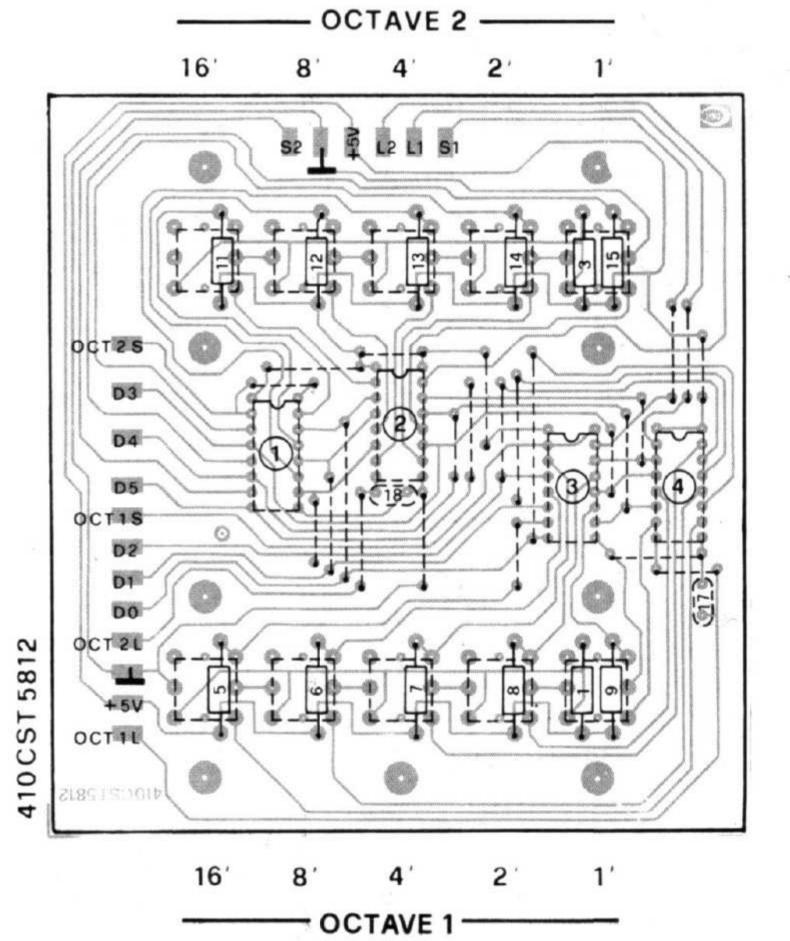

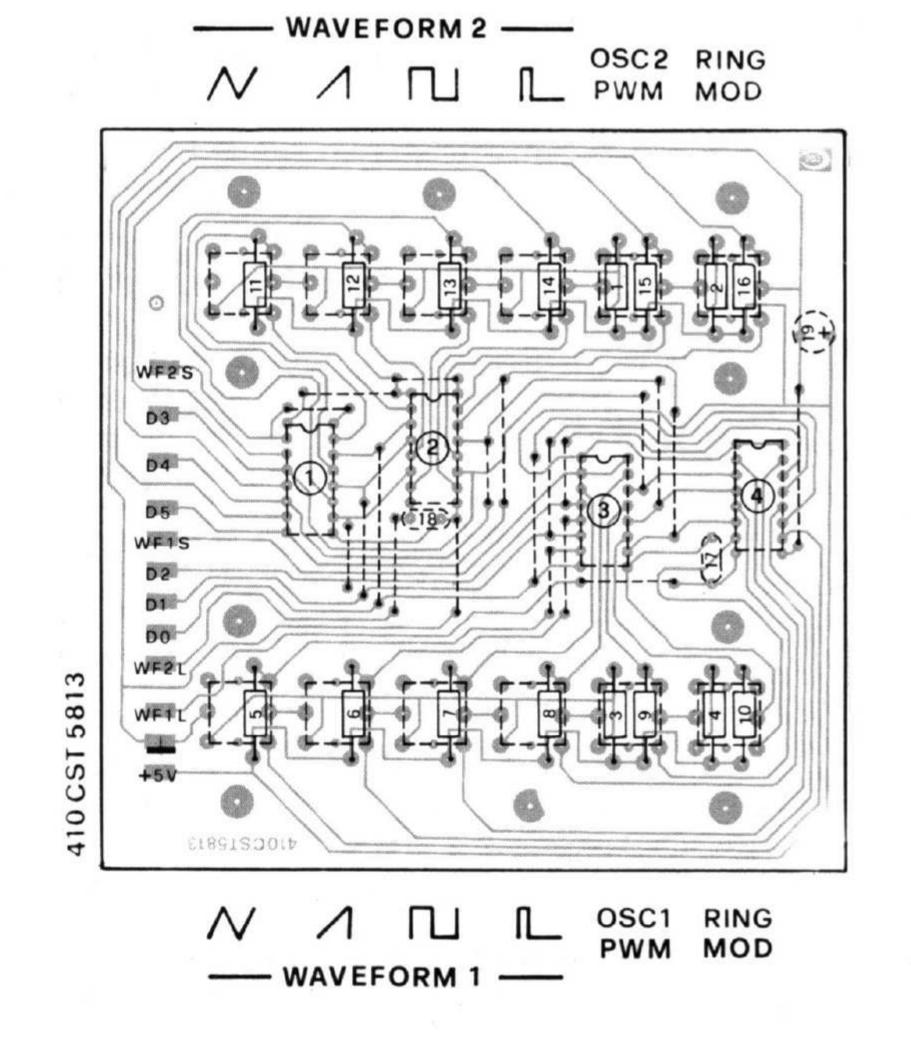


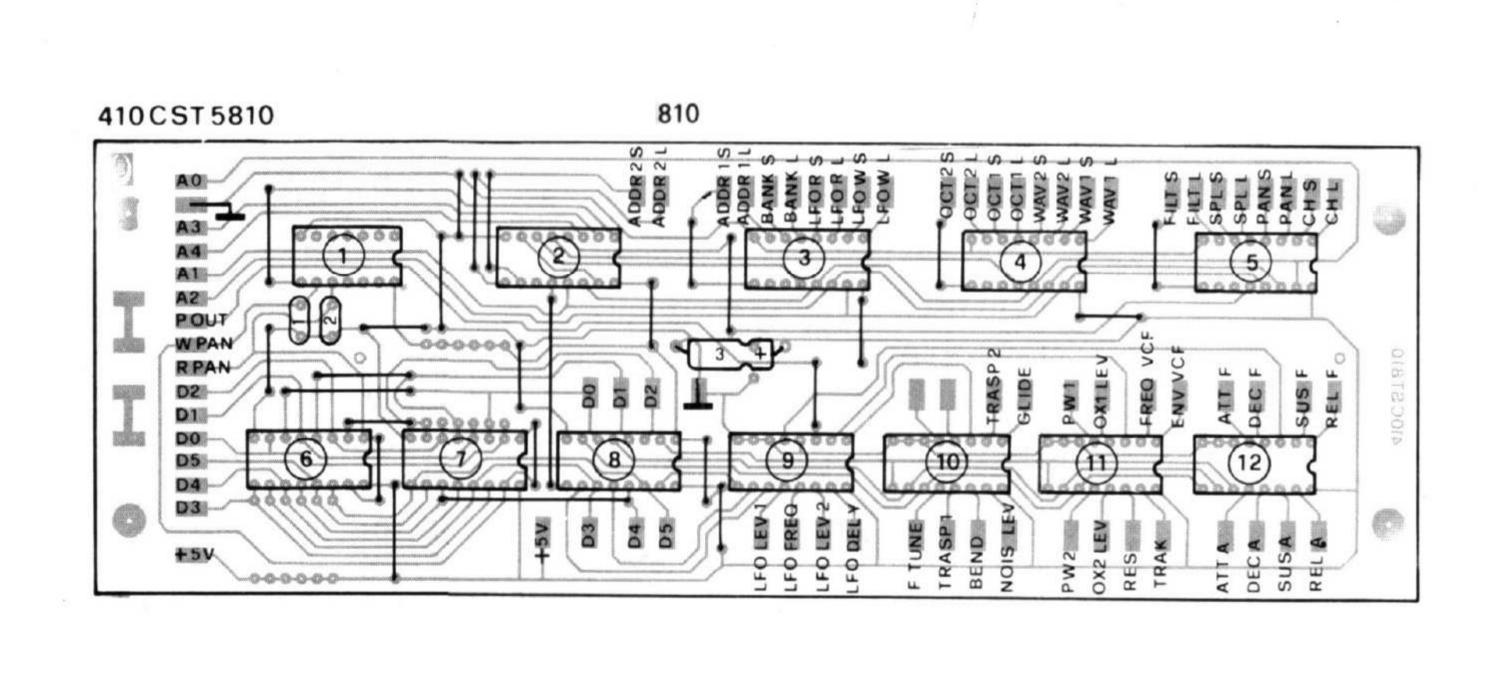


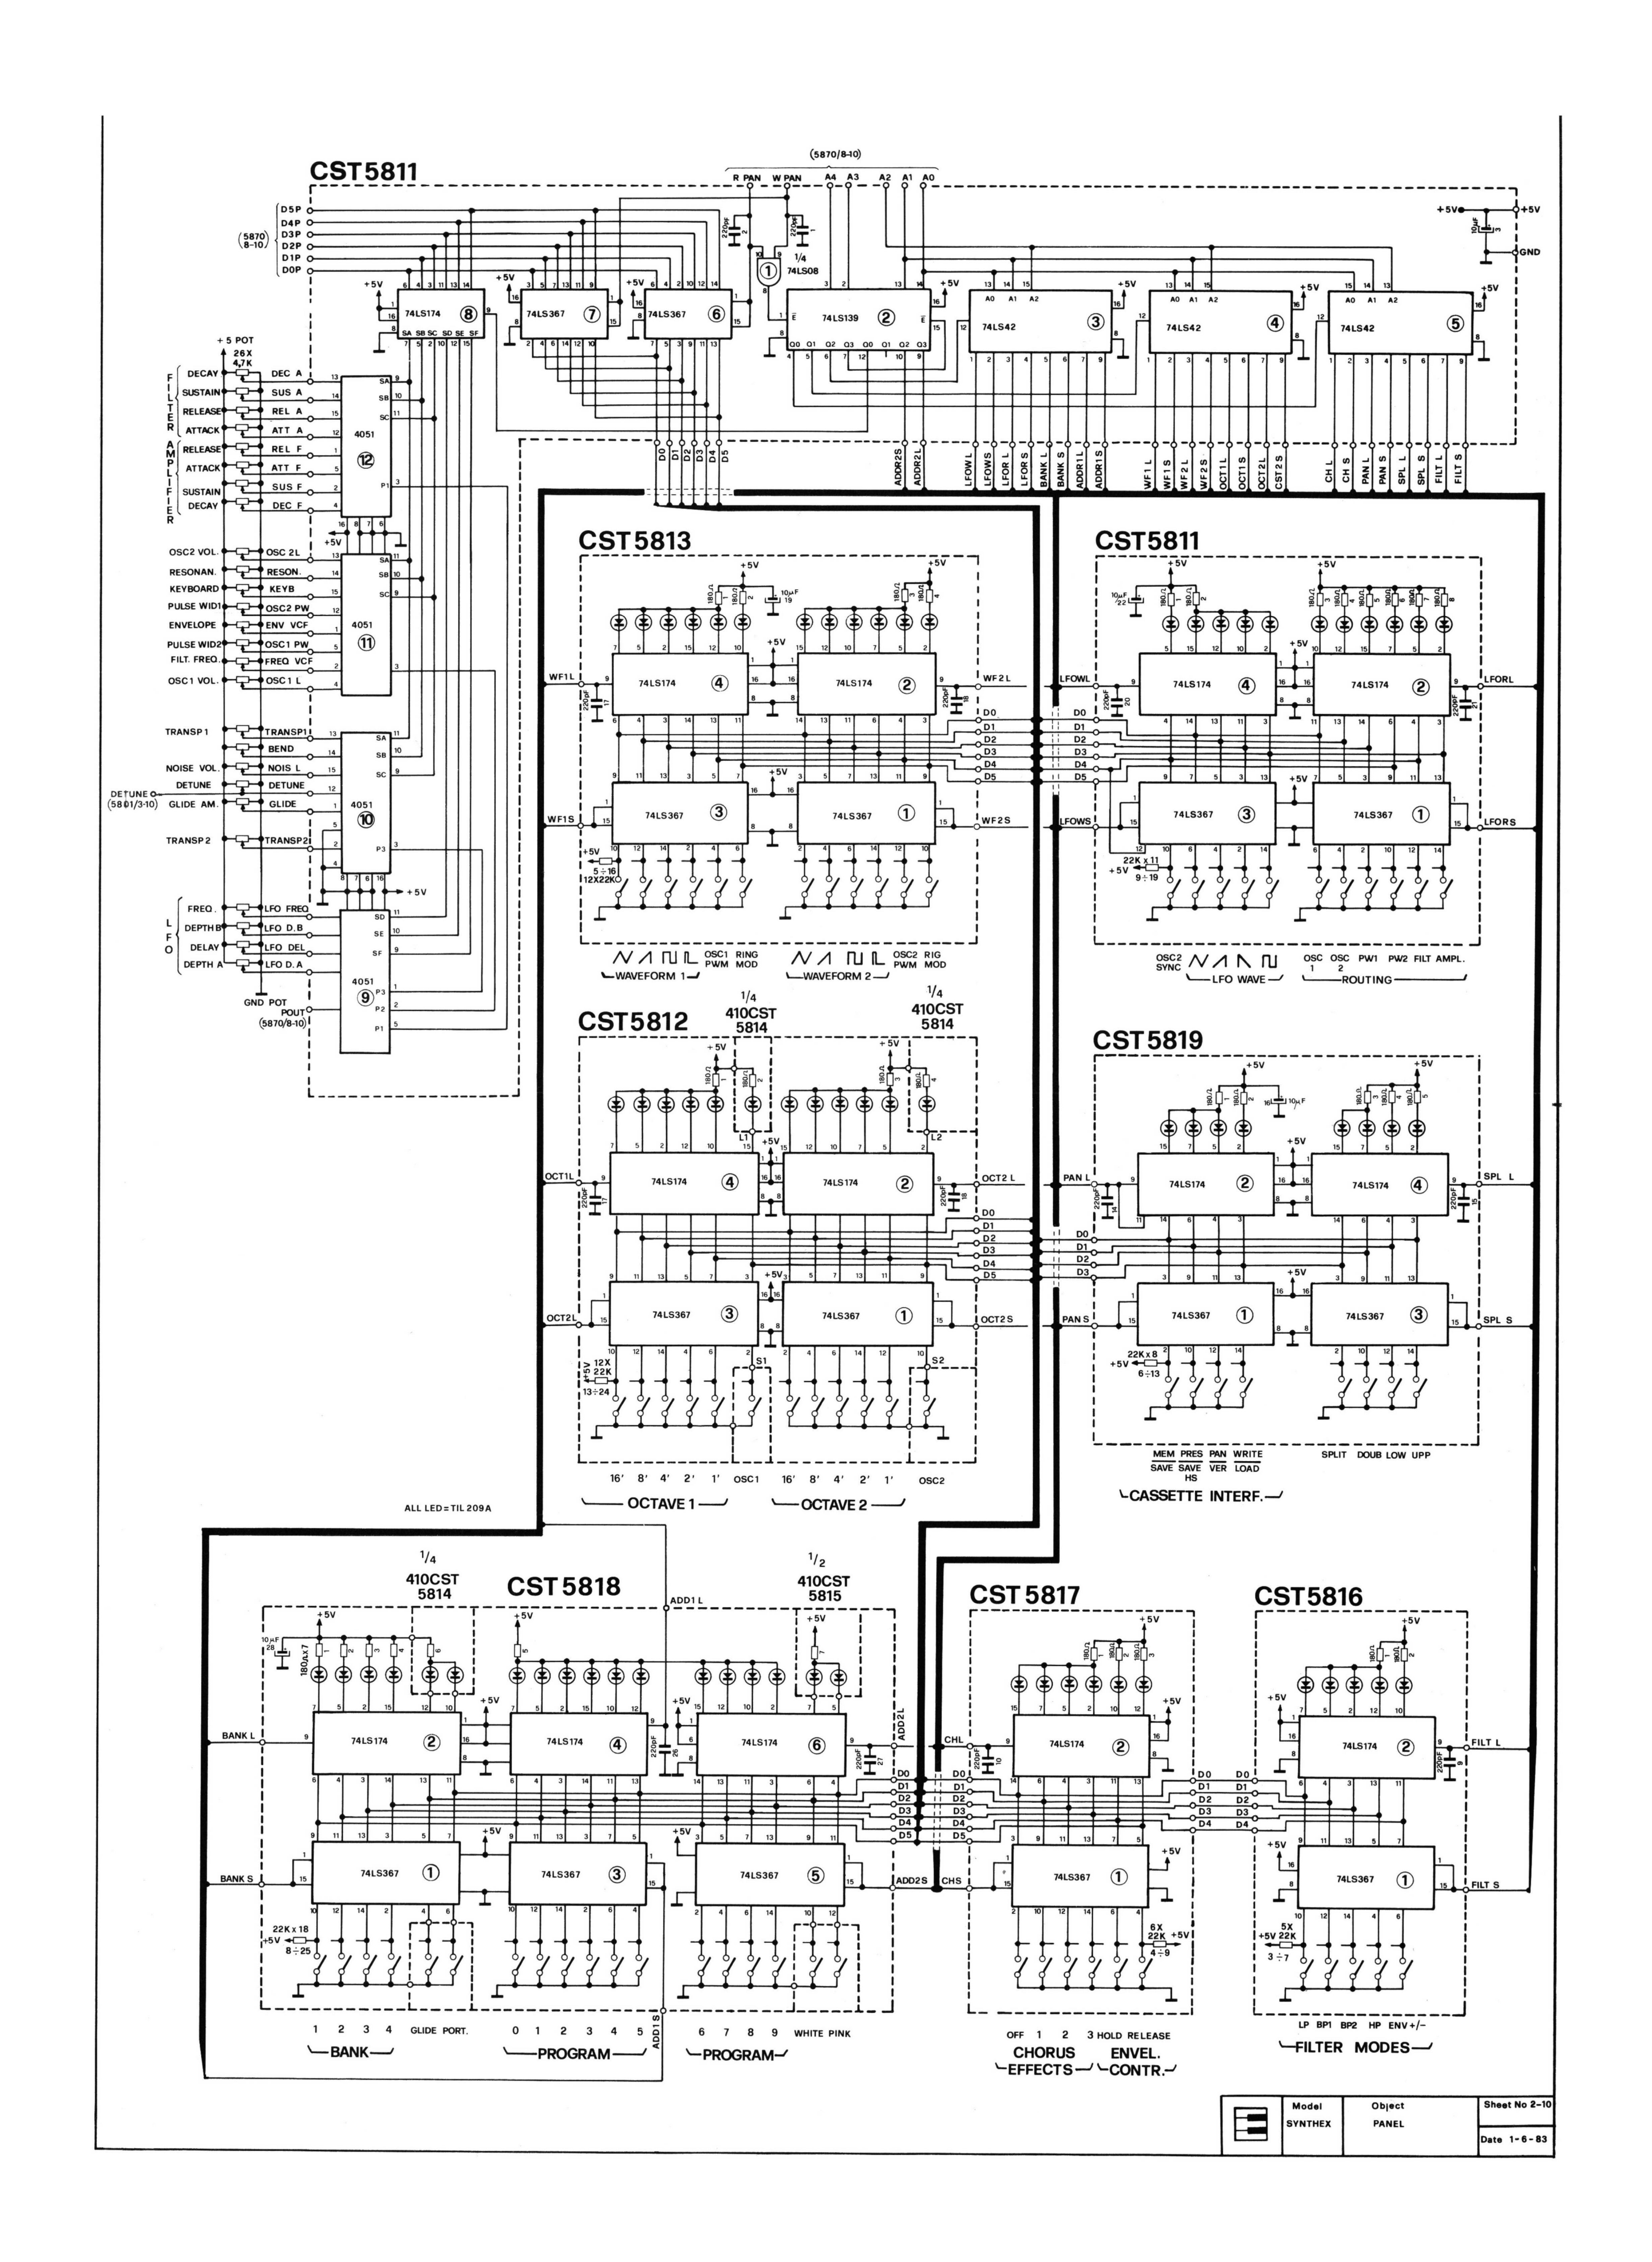


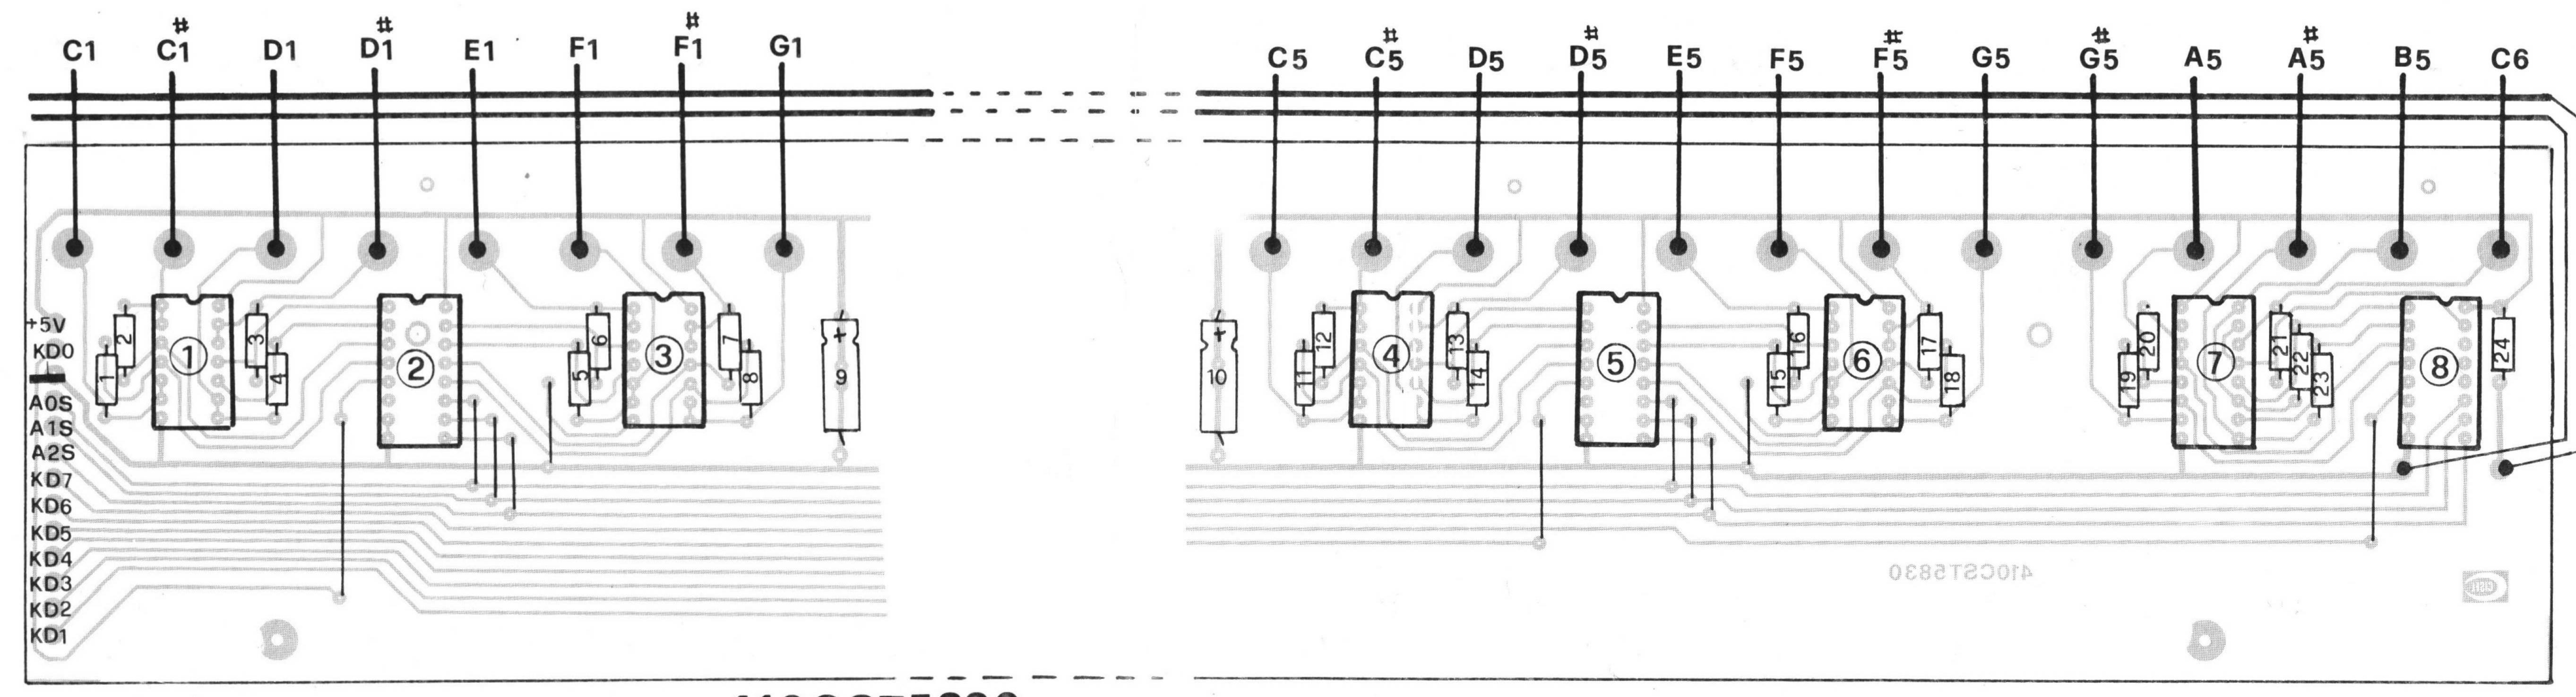



410CST5830

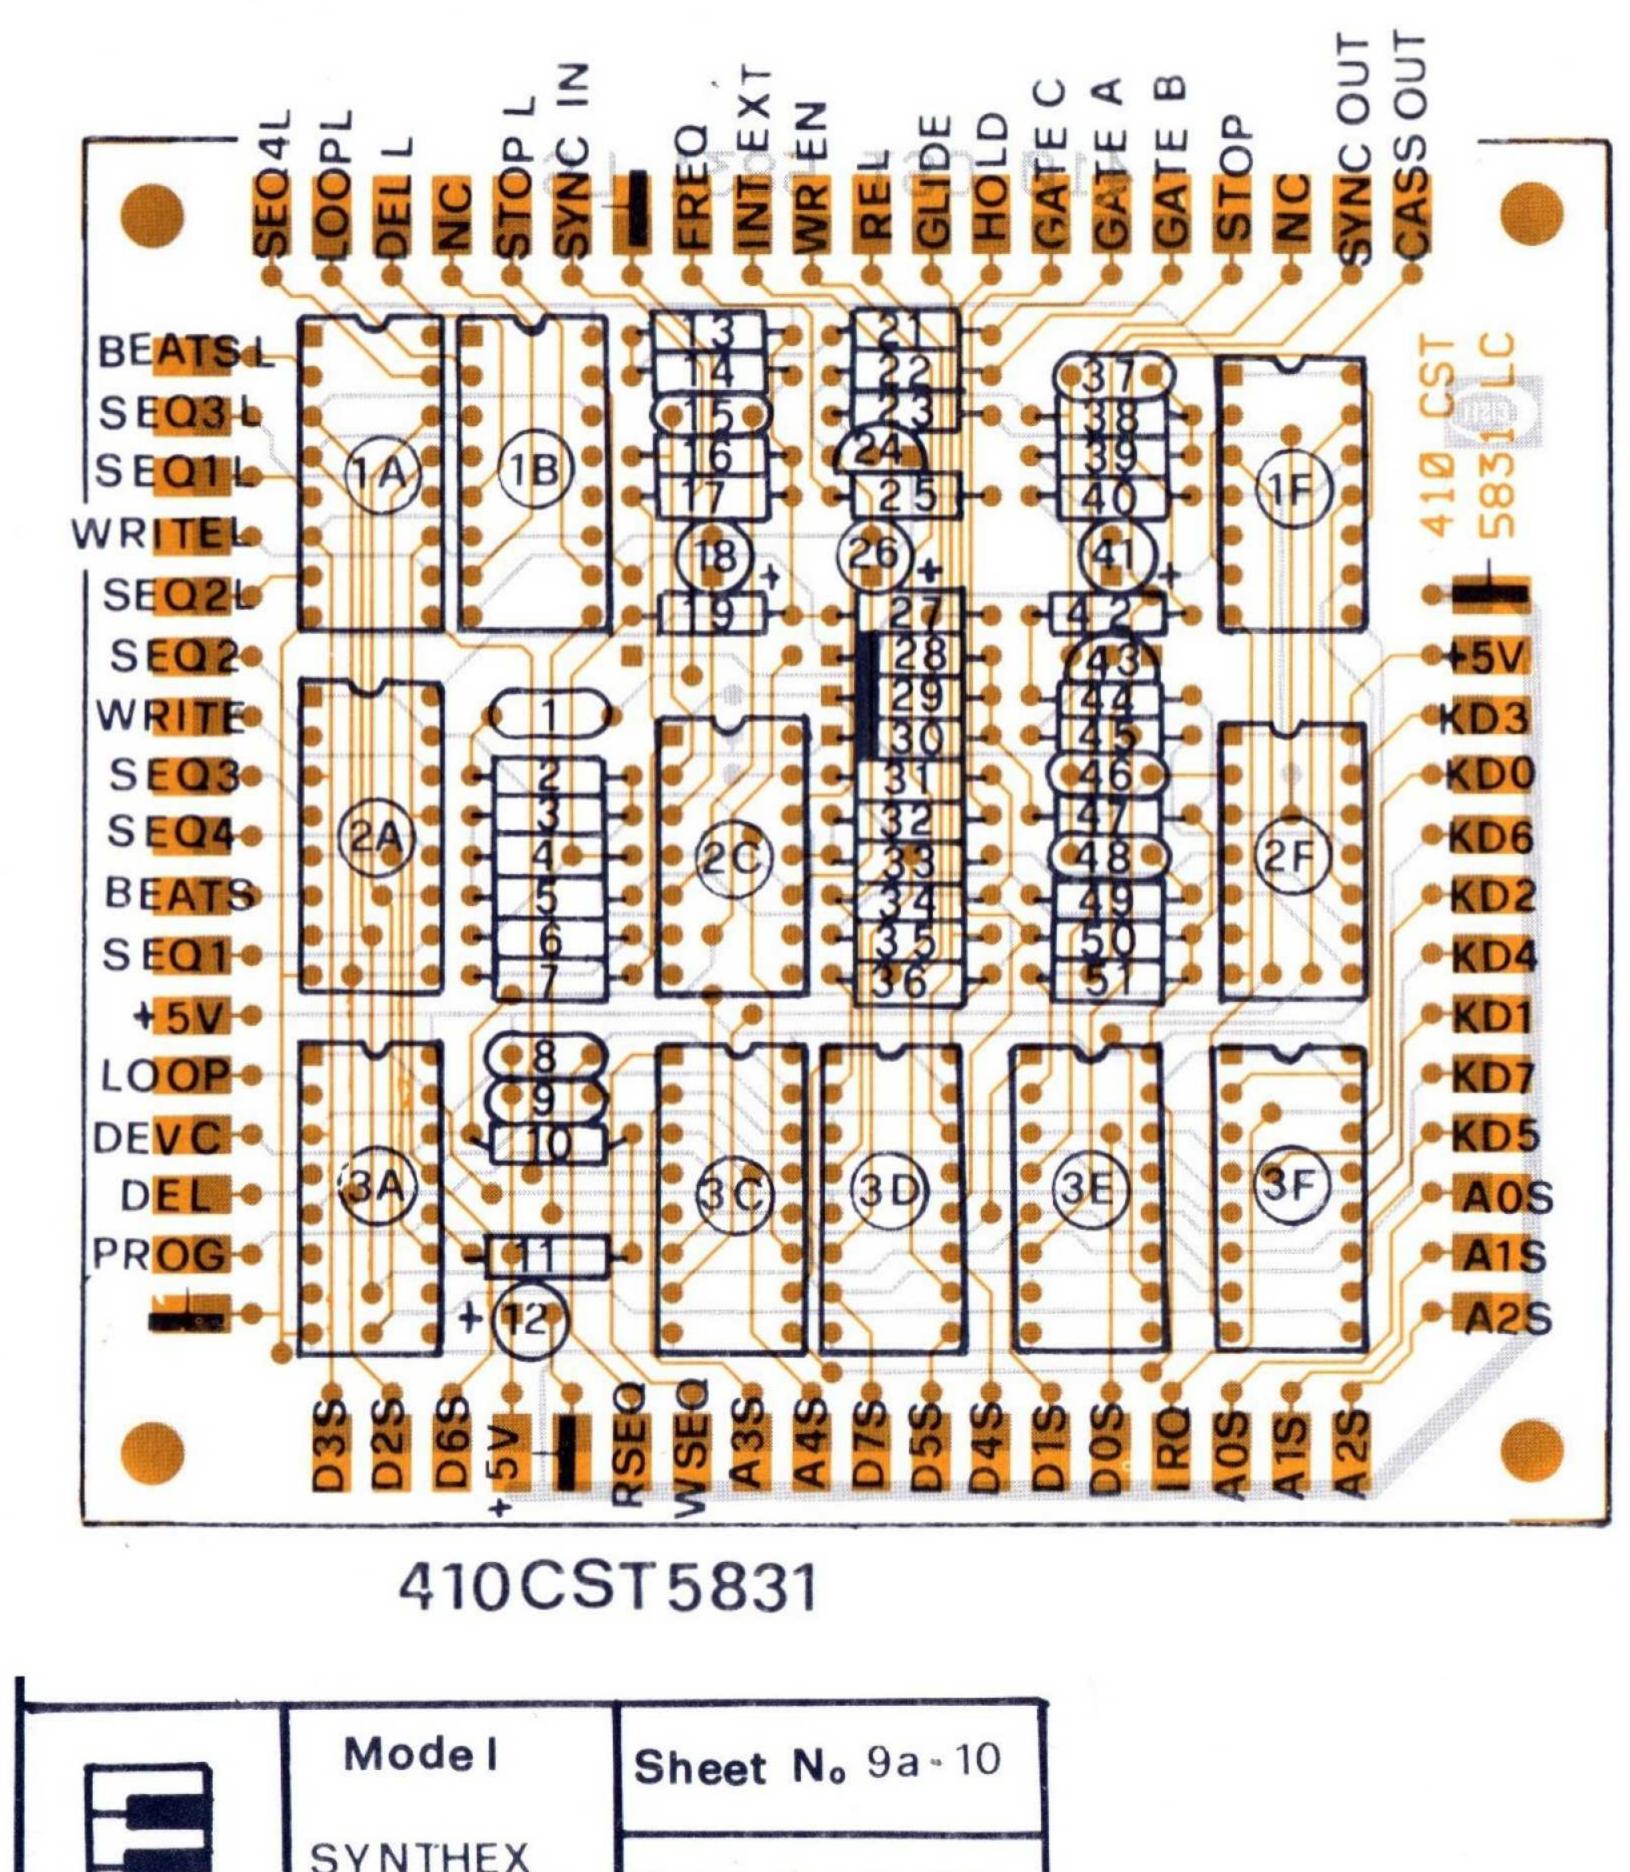


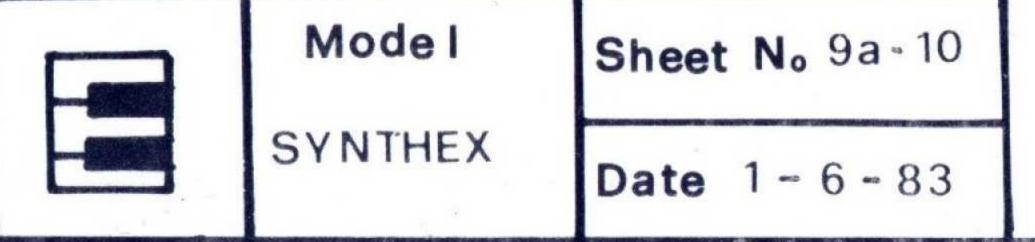

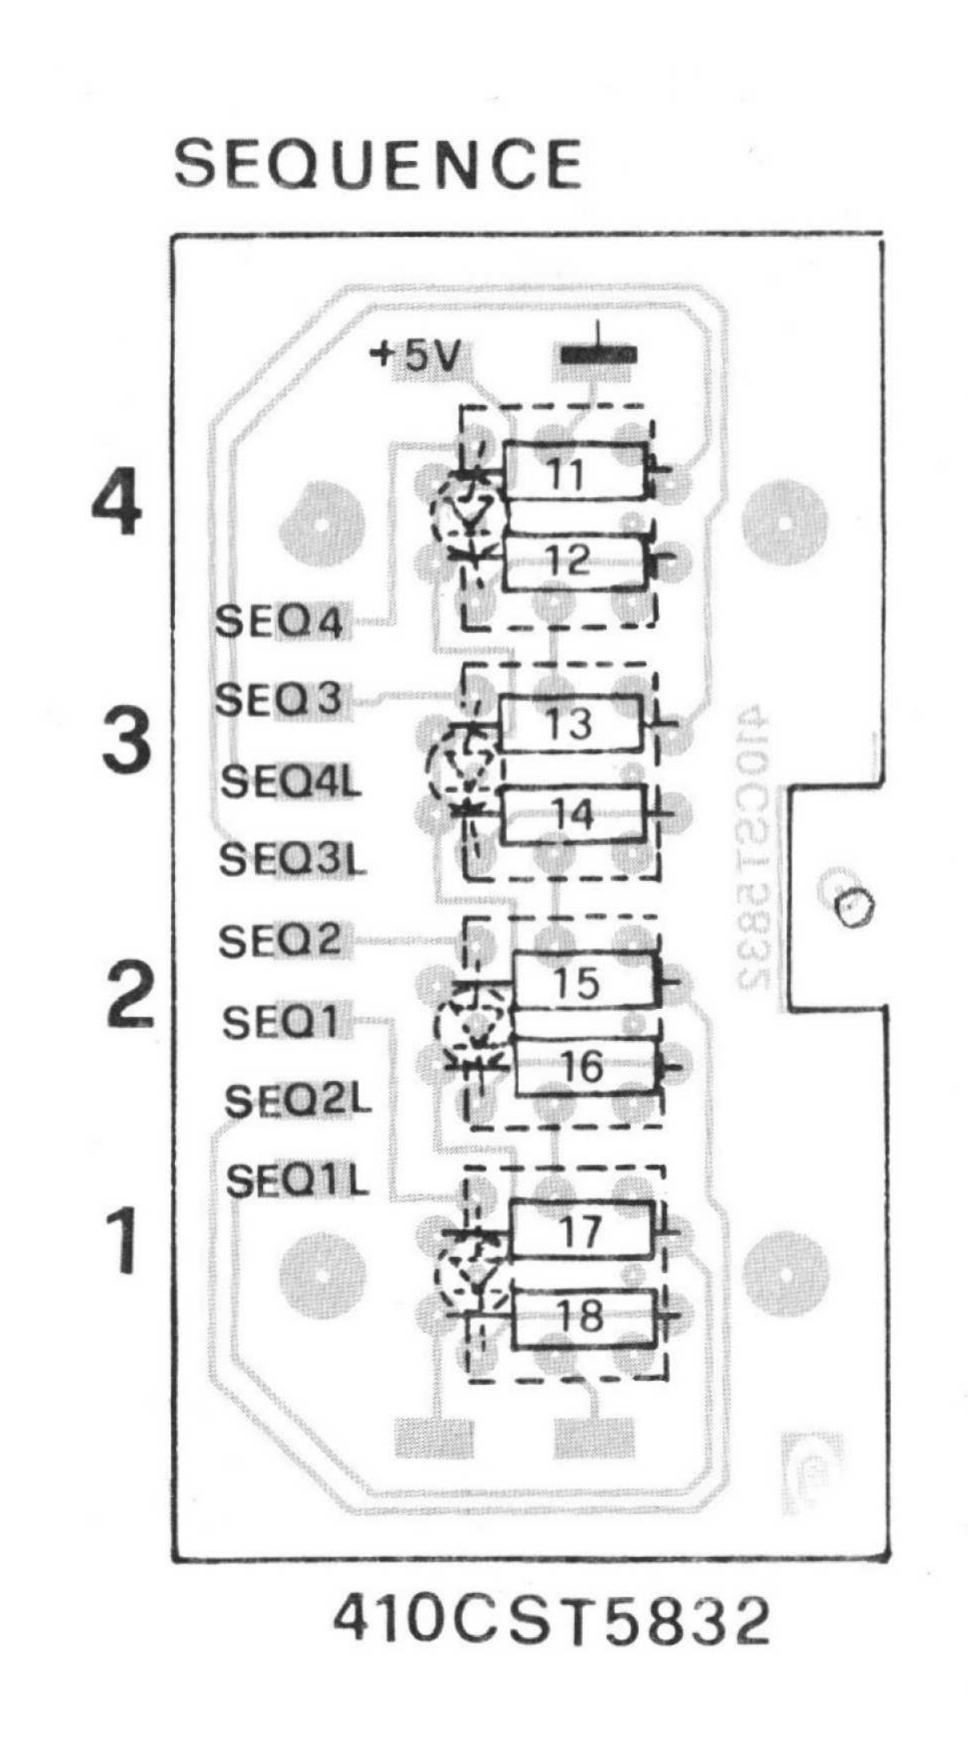

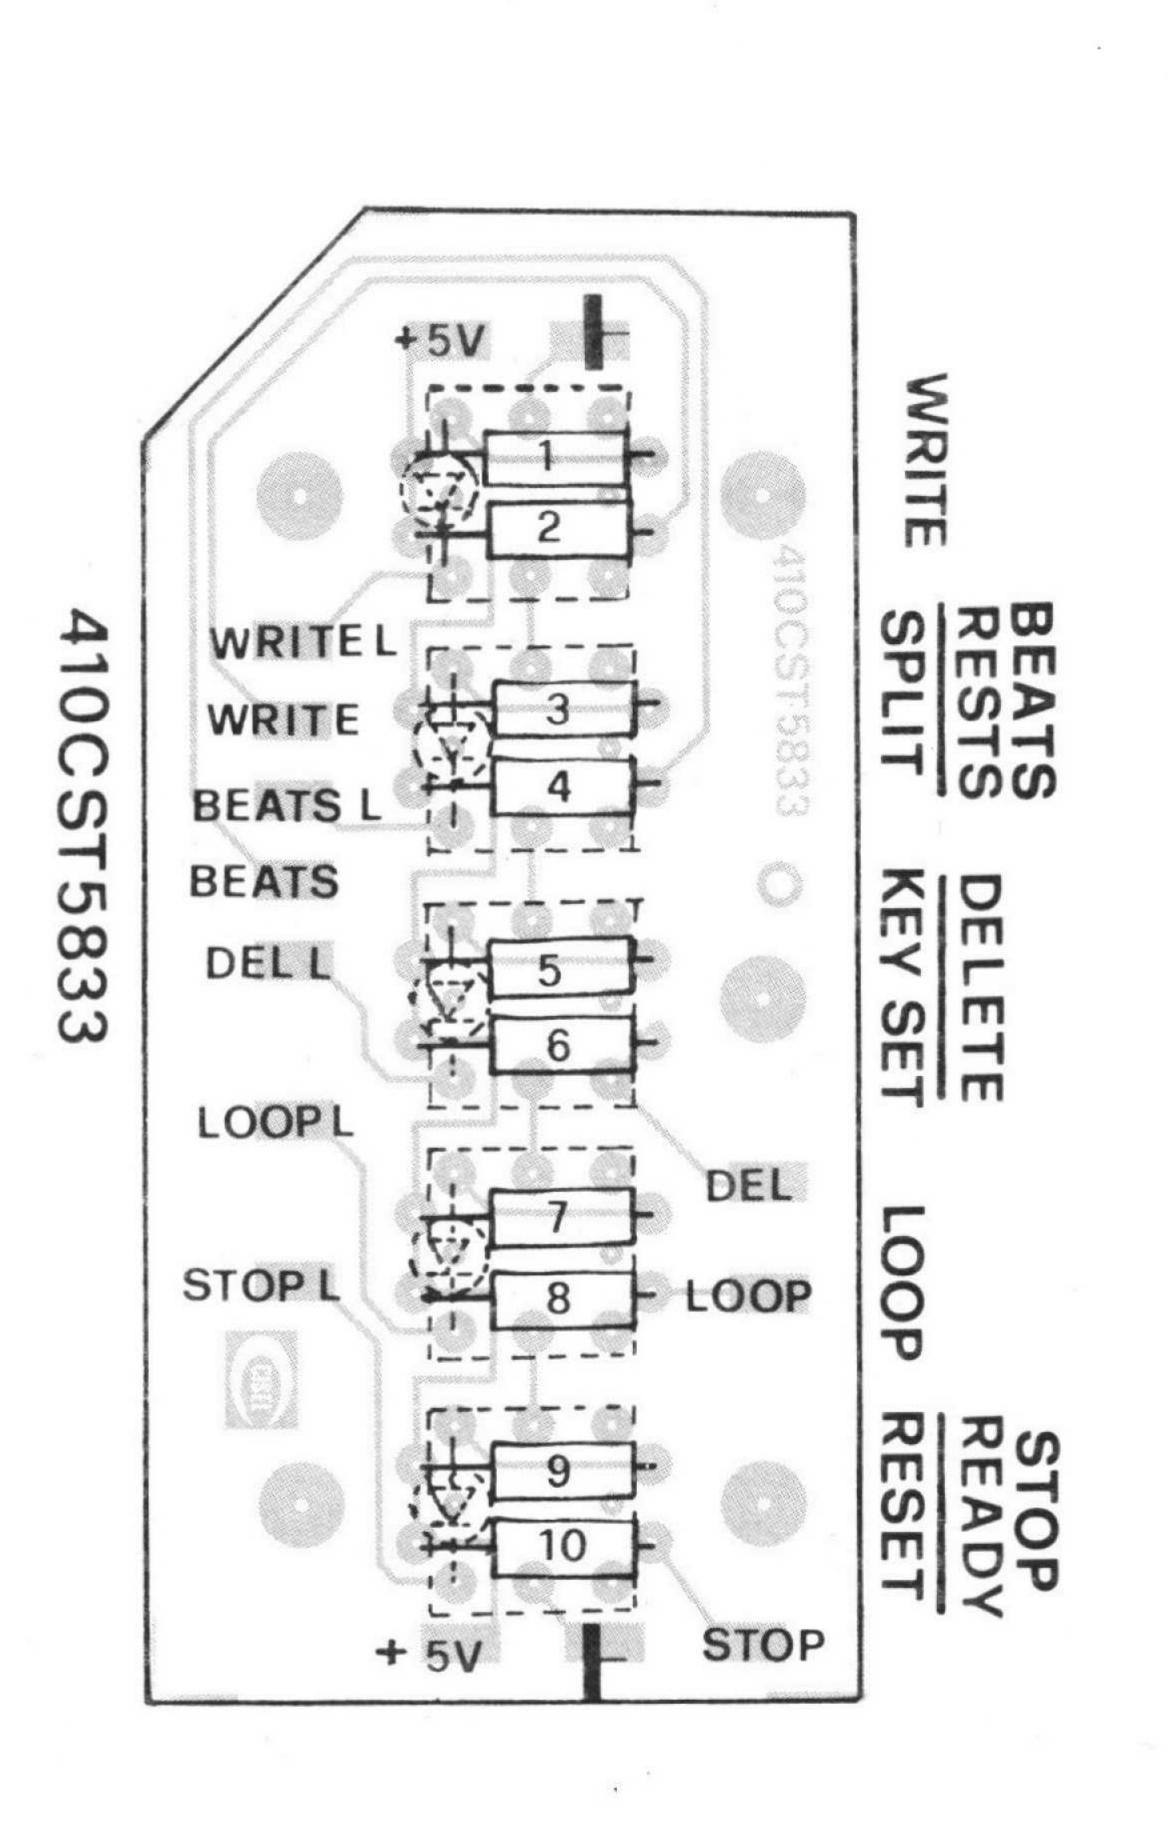

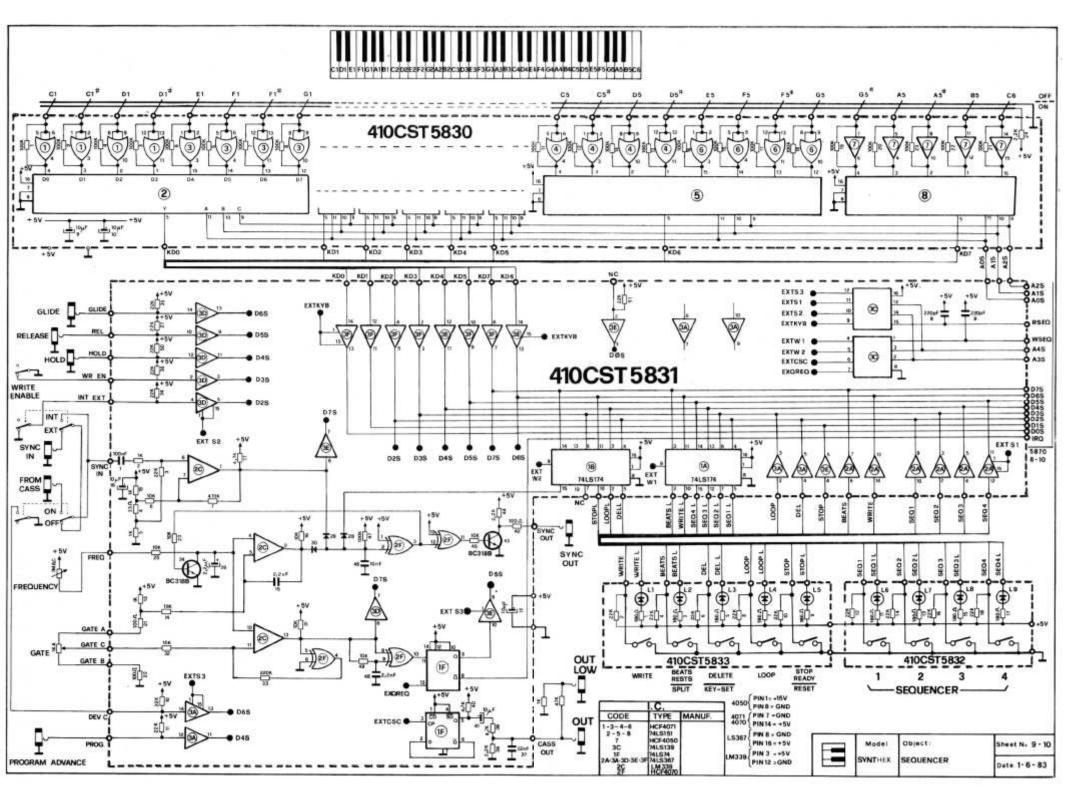


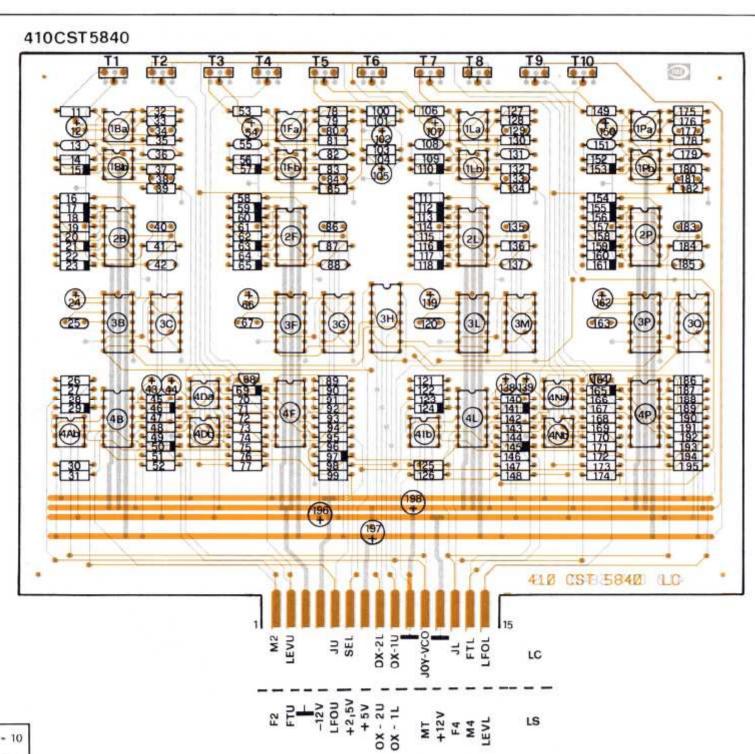


Model SYNTHEX

Sheet No5a - 10

Date 1 - 6 - 83

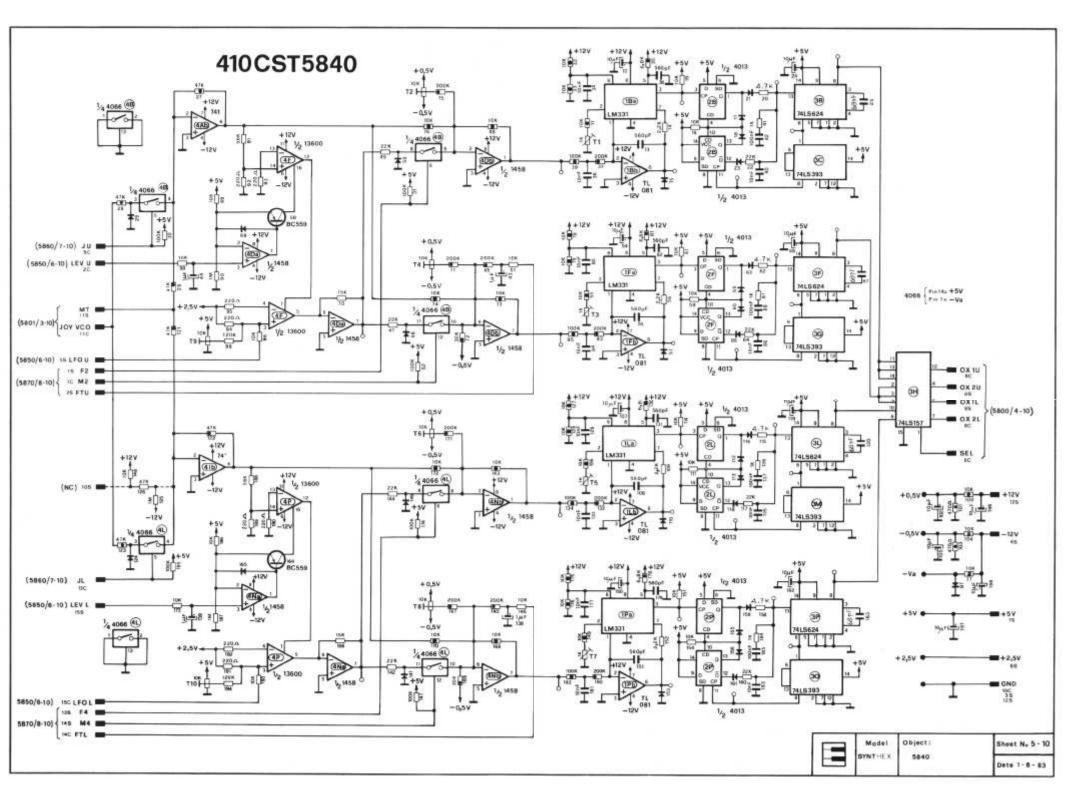

410CST5850

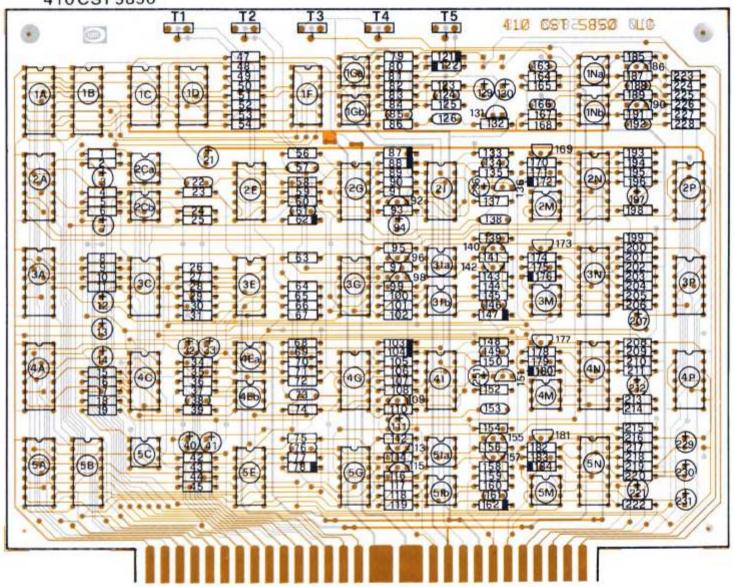



PW2U VCF FU MPW 2U PW1U DEP 21 NOIS U +2,5 V +12 V PW 1L DEL U -127 LFOFL DEP 1U 50 07 MVCAL MPW1 MOD ALIMOD AU GLI XL GLI FL MPW1L +50 LC GLI FUI MVCAU +2,50 DEP 1L DEP2U LFOFU GLI XU D5 D5 A5 A6 PW2L VCF XL MVCFU VCFL DELL -127 +127 MVCFL MPW 2L NOIS +50 LS

Model


Sheet No 6a - 10


SYNTHEX Date 1-6-83

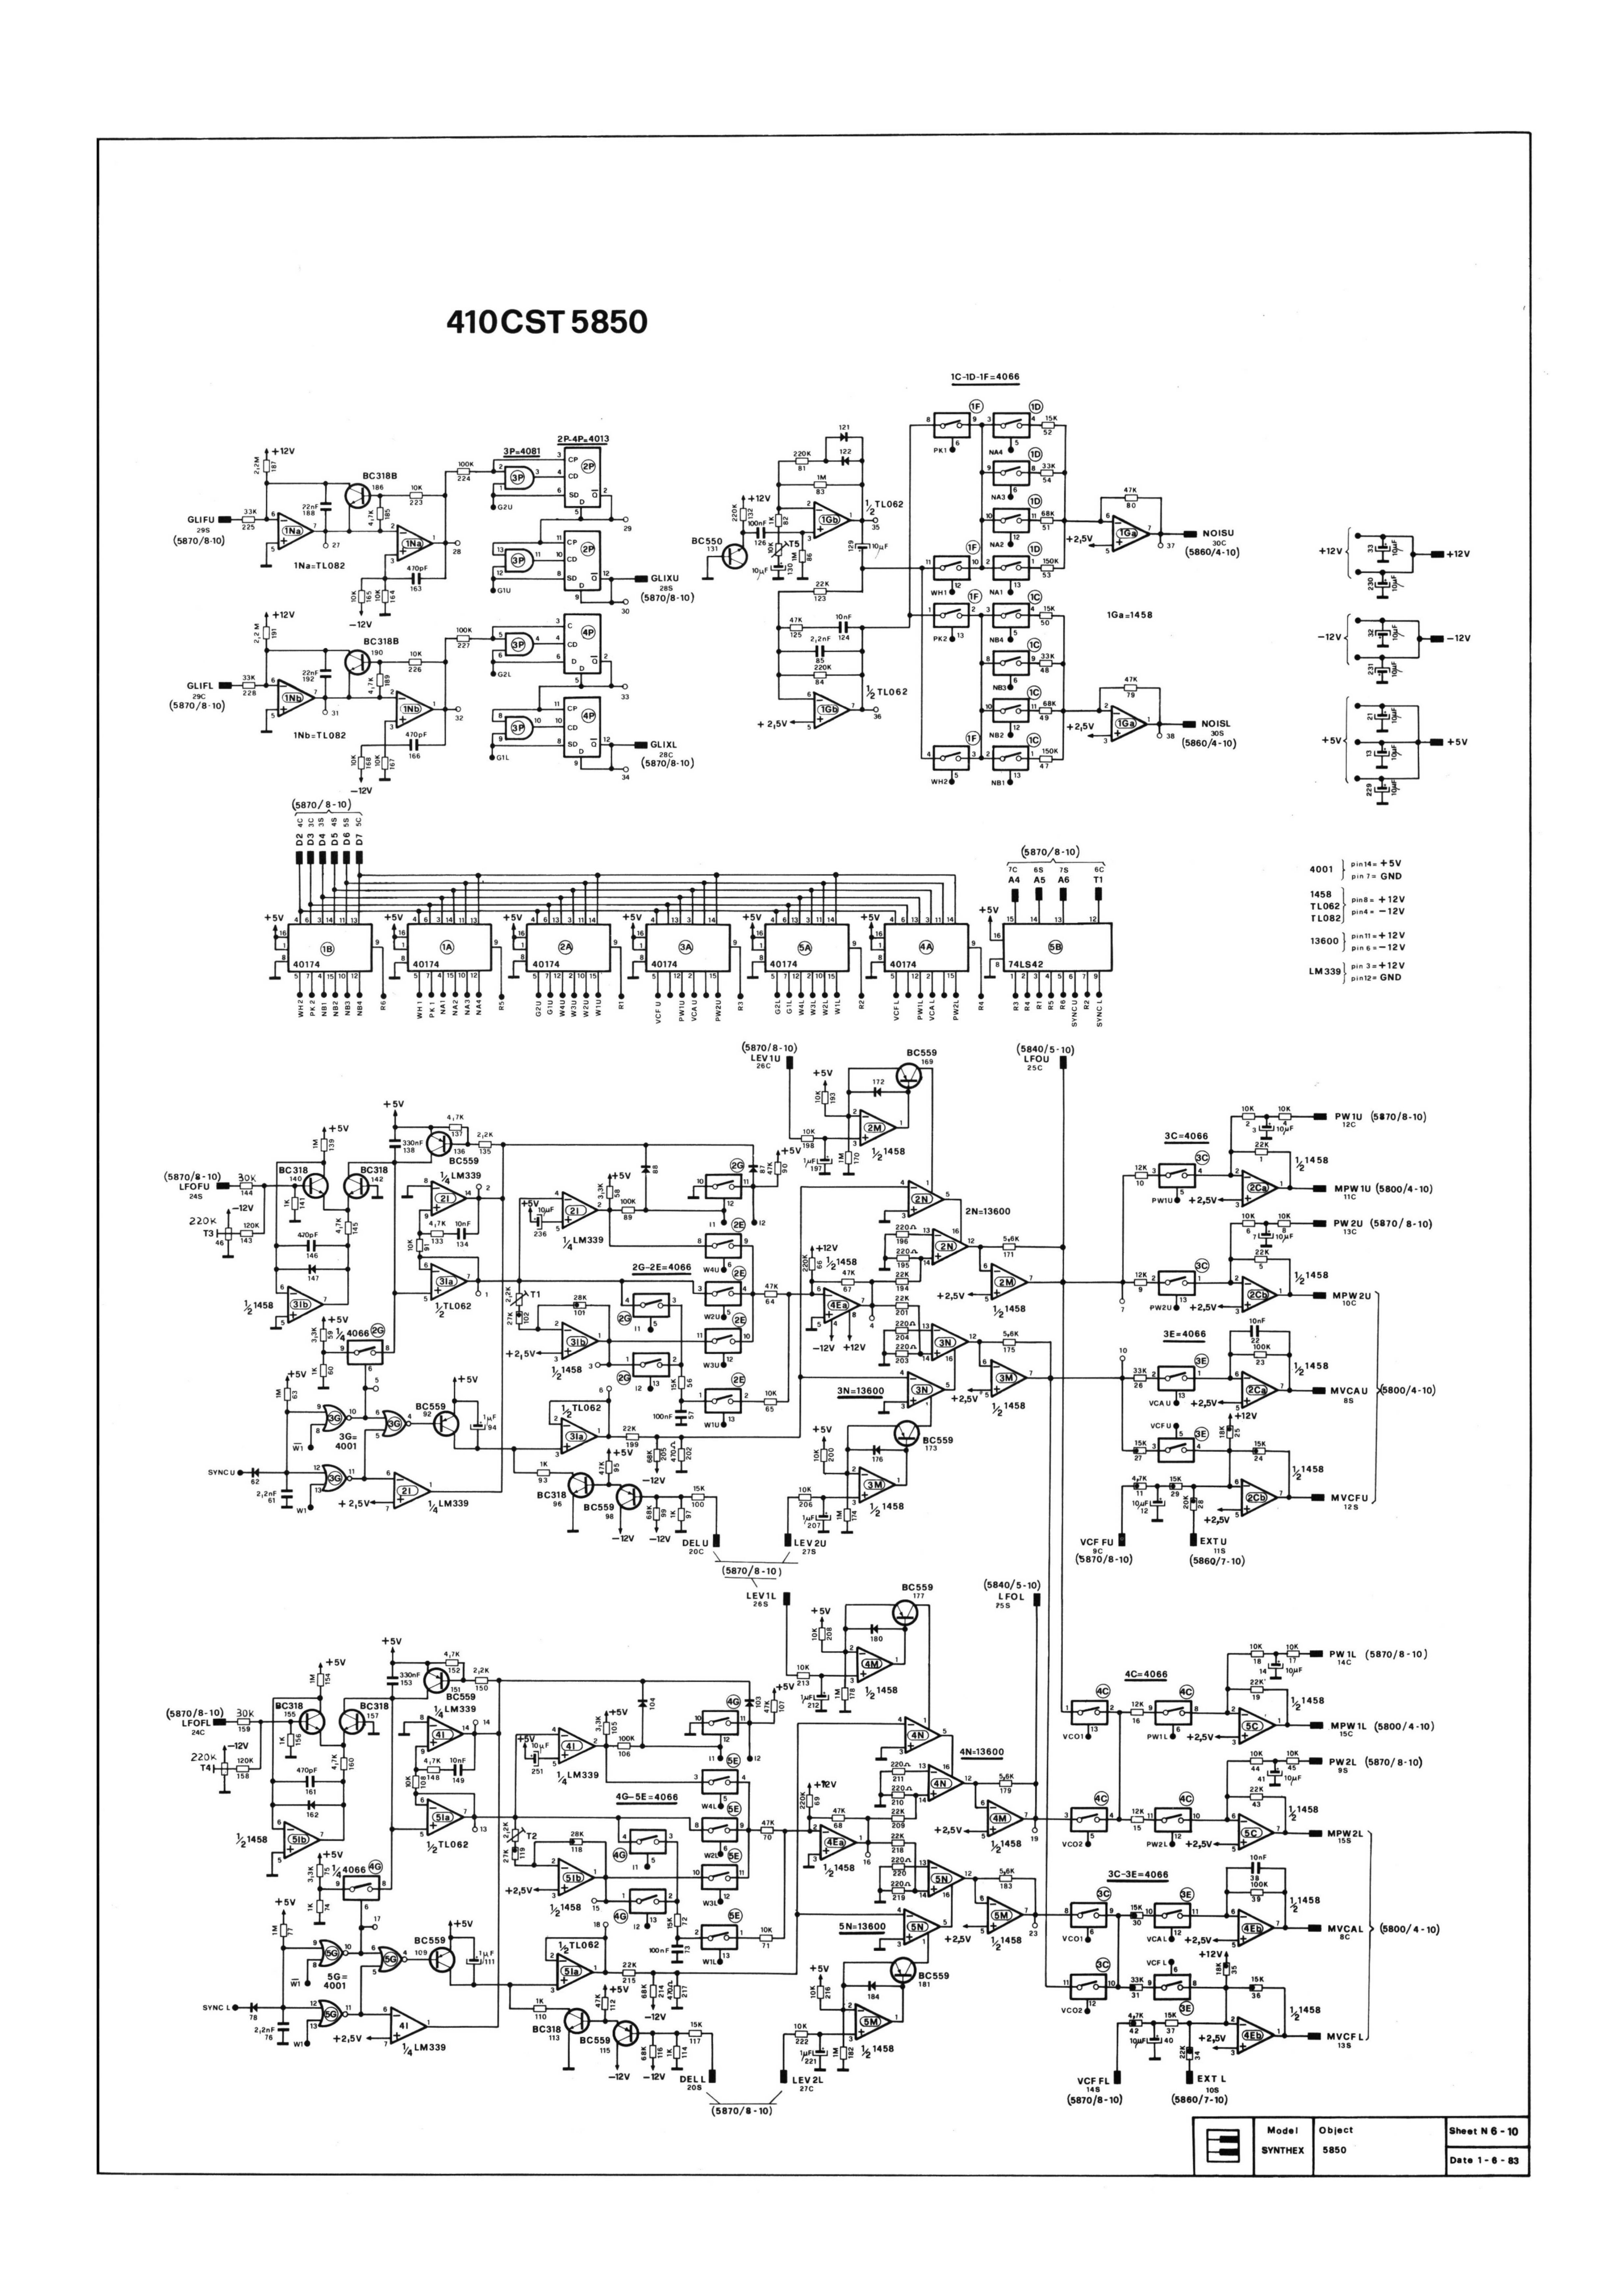

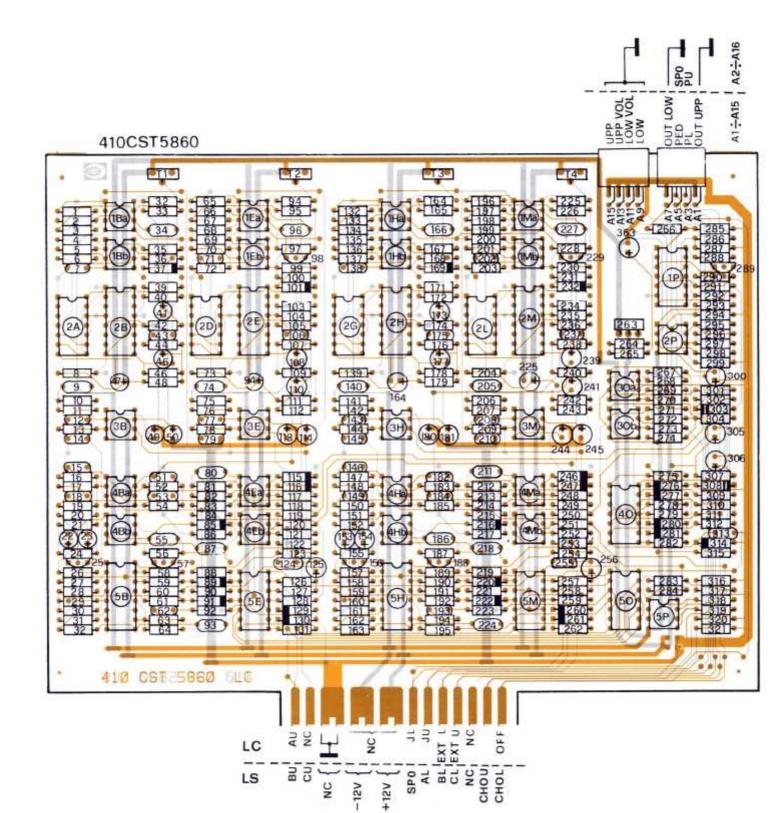

Model	Sheet N₀ 7a - 10
SYNTHE	Date 1-6-83

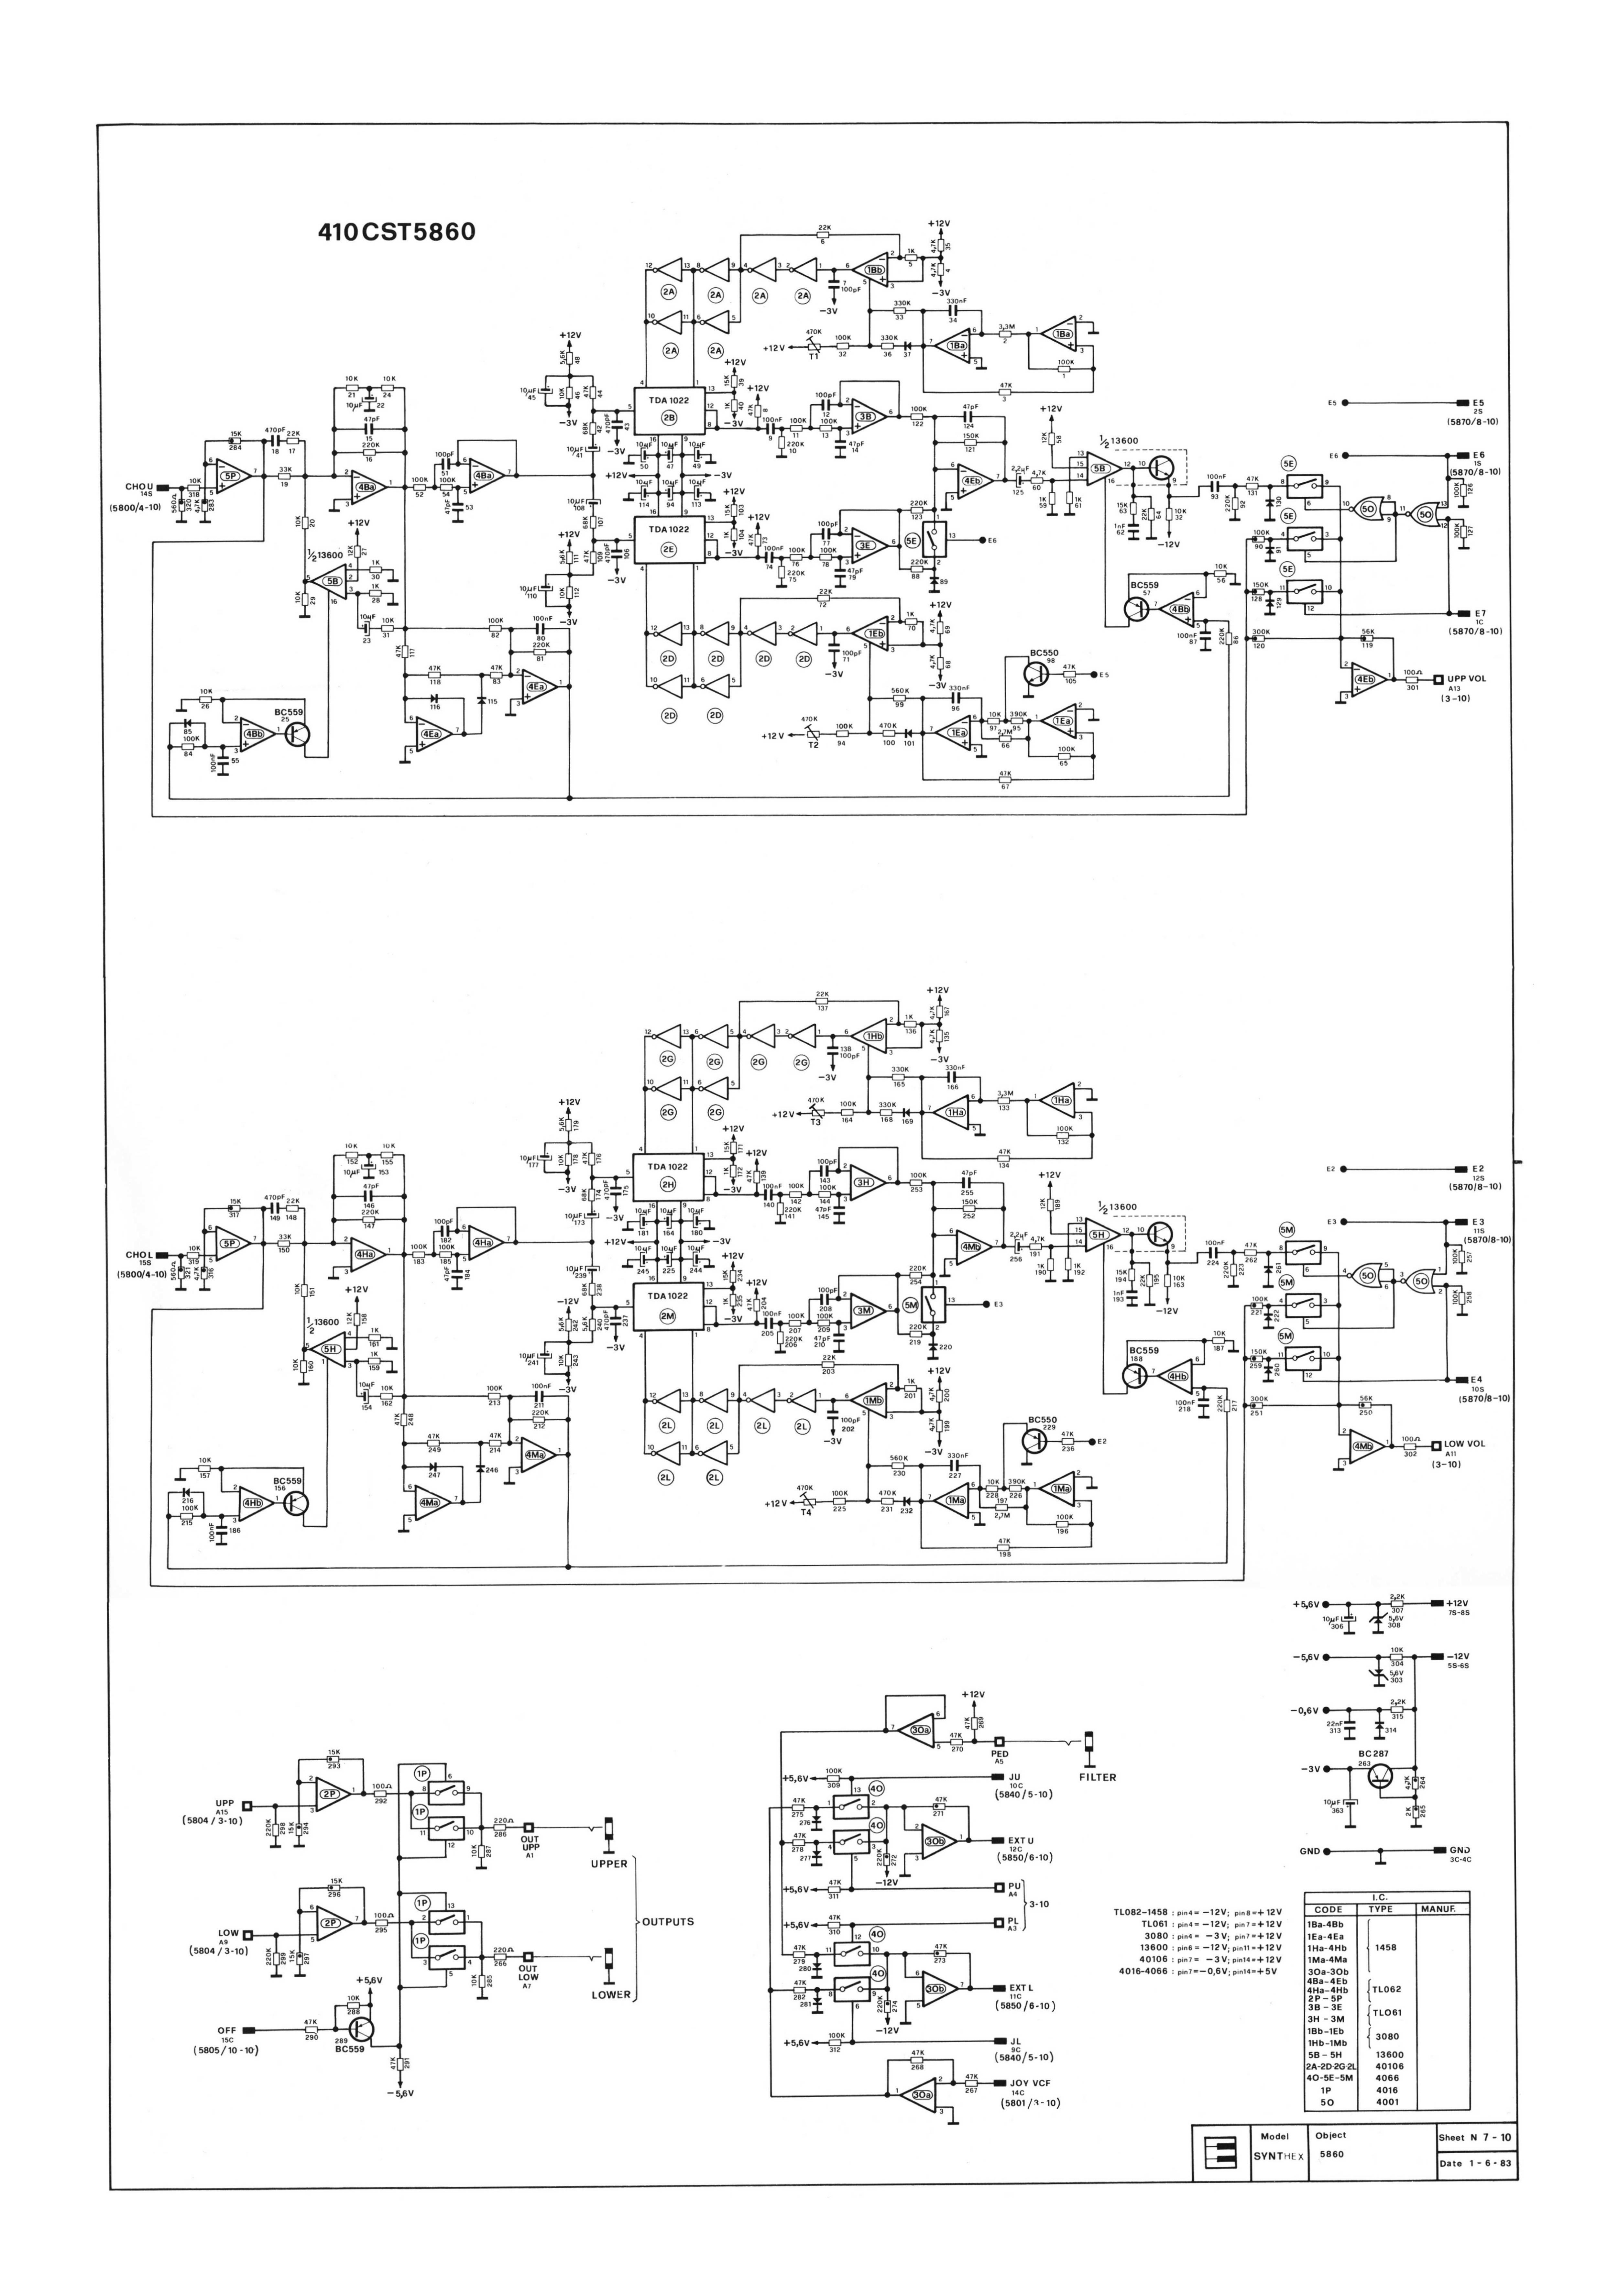

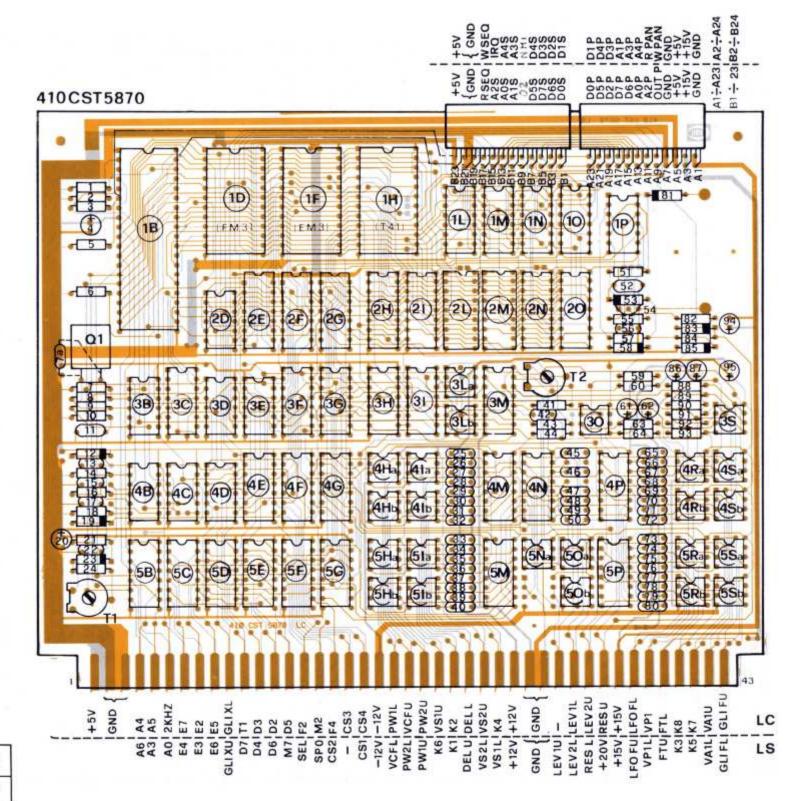

Model Sheet Na 8a-10
SYNTHEX Date 1 - 6 - 83

